



SMARTsemi™

SMARTsemi

Memory IC Datasheet

Wide Temperature eMMC 153b

Preliminary Release

February 2025
Rev 0.2



REVISION HISTORY

Date	Revision	Section(s)	Description
January 2025	0.1	All	Preliminary Release
February 2025	0.2	Performance, ECSD Register	Update Performance and ECSD Register Table



ESD Caution – Handling

Static electricity may be discharged through this disk subsystem. In extreme cases, this may temporarily interrupt the operation or damage components. To prevent this, make sure you are working in an ESD-safe environment. For example, before handling the disk subsystem, touch a grounded device, such as a computer case, prior to handling.

© 2025 SMARTsemi™. All rights reserved.



TABLE OF CONTENTS

1	GENERAL DESCRIPTION	6
1.1	Overview	6
1.2	Features.....	7
2	OPERATIONAL CHARACTERISTICS	9
2.1	Performance	9
2.2	Power Consumption	9
2.3	Data Reliability	10
2.4	Failure Rate	10
2.5	Environmental Conditions	10
2.6	Endurance.....	10
3	PRODUCT DESCRIPTION	11
3.1	Functional Block Diagram	11
4	PACKAGE INFORMATION	12
4.1	Signal Interface	12
4.1.1	eMMC Ball-out Diagram	12
4.1.2	Signal Descriptions.....	13
5	eMMC MECHANICAL SPECIFICATIONS	14
5.1	Package Dimensions	14
5.2	Recommended Reflow Profiles	15
6	ELECTRICAL SPECIFICATION	16
6.1	Electrical Interface.....	16
6.2	DC Specifications.....	16
7	REGISTER	18
7.1	CID Register	18
7.2	OCR Register.....	19
7.3	CSD Register	19
7.4	ECSD Register.....	21
8	PART NUMBERS	28
8.1	Part Number Decoder	29



LIST OF FIGURES

Figure 1: eMMC Block Diagram	11
Figure 2: 153-Ball Pin Assignments (Top View, Balls Down)*	12
Figure 3: 153-Ball BGA Dimensions – 11.5 mm x 13 mm x 0.8 mm	14
Figure 4: System Architecture	16
Figure 5: Recommended eMMC Connection	17



LIST OF TABLES

Table 1: Performance Table.....	9
Table 2: Current Consumption	9
Table 3: Failure Rate	10
Table 4: Environmental Conditions and Test Conditions	10
Table 5: Reliability Characteristics	10
Table 6: Signal Descriptions	13
Table 7: Recommended Reflow Profile	15
Table 8: Power Requirements.....	16
Table 9: Recommended Capacitor and Resistor.....	17
Table 10: Supported Device Registers.....	18
Table 11: CID Register Field Parameters.....	18
Table 12: OCR Register Field Definitions.....	19
Table 13: CSD Register Field Parameters	20
Table 14: Part Numbering Information	28



1 GENERAL DESCRIPTION

1.1 Overview

SMARTsemi's eMMC Product Family is an embedded Flash storage solution in a small BGA package designed specifically for the most demanding applications. SMARTsemi's eMMC products address the need for enhanced reliability by incorporating on-board error detection and correction, Global wear leveling algorithms, and other data management techniques to provide reliable operation and maximum NAND media life expectancy over the product life cycle.

Additionally, the eMMC controller and firmware hide the increased complexities of NAND media from the host processor and allow for faster product development and time to market.

Target applications for SMARTsemi's eMMC solution include but are not limited to IoT, Set Top Box, Industrial and Networking appliances wanting a rugged yet cost effective high density mass storage solution.



1.2 Features

- Industrial Standard Interface
 - JEDEC / eMMC Standard Version 5.1 Compliant

- eMMC 5.1 Enhanced Features
 - 12-signal interface (including CMD, CLK, DS, DAT[7:0], and RST_n)
 - Programmable bus width: 1-bit, 4-bit, and 8-bit
 - Supports HS400 high speed interface timing mode
 - Up to 200MHz clock frequency
 - Supports eMMC Field firmware update (FFU)
 - Supports eMMC production state awareness (PSA)
 - Supports eMMC device health report
 - Supports Boot Feature and Boot Partition
 - Replay Protected Memory Block (RPMB)
 - Trim, Sanitize, Discard, Secure Erase
 - High Priority Interrupt (HPI)
 - Background Operations, Garbage Collection and WearLeveling
 - Reliable Write
 - Supports Command Queuing
 - Supports Enhanced Strobe in HS400 Mode
 - Supports eMMC Background Operation Control
 - Supports Lock/Unlock
 - Supports Secure Removal Type
 - Supports Configurable Drive Strength
 - Supports Write protect, Secure Write Protection
 - Supports Cache, Cache Barrier, Cache Flushing Report
 - Hardware/ Software Reset
 - Supports PON, Sleep/Awake

- Robust Data Protection and Endurance
 - Configurable ECC engine with zero overhead pipeline greatly reduces data loss rates and increases data endurance
 - Static data refresh and early block failure monitoring/retirement ensure the data reliability
 - Power loss detection and mapping table auto-rebuild algorithm support power-down data protection
 - Global wear leveling maximizes product lifespan with minimal wear leveling and write amplification overhead

- Supply Voltage
 - eMMC Interface Power (VCCQ): 1.70-1.95V
 - NAND Memory Power (VCC): 2.7-3.6V



- Multiple Densities and Packages
 - Available in 8GB/16GB MLC mode density
 - 153-ball standard BGA packages
 - Green Package, REACH and RoHS Compliant

- Operating Temperature
 - Wide Temperature: -40°C ~ +105°C



2 OPERATIONAL CHARACTERISTICS

All listed values are typical unless otherwise stated.

2.1 Performance

Table 1: Performance Table

MLC Partition Burst Performance

Capacity	HS400 Performance			
	Seq. Read (MB/s)	Seq. Write (MB/s)	Random Read 4KB (IOPS)	Random Write 4KB (IOPS)
8GB	265	68	6290	1873
16GB	275	94	7290	1886

(1) Test condition: Bus in x8 I/O, HS400 mode. Write cache off.

2.2 Power Consumption

Table 2: Current Consumption

Condition		I _{cc} /I _{ccq} (Typical)		Units
		8GB	16GB	
Write	DDR52	45/74	43/65	mA
	HS200	59/84	62/78	mA
	HS400	59/82	73/79	mA
Read	DDR52	42/123	34/109	mA
	HS200	80/121	65/119	mA
	HS400	111/144	99/150	mA
Idle		110/470	220/870	uA



2.3 Data Reliability

- **Static and Dynamic Wear Leveling:** This feature eliminates overstressing Flash media by spreading the data writes across all Flash physical address space, including logical areas that are not written by the user. The data is wear leveled across the entire drive.
- **ECC:** Utilize LDPC ECC to provide correction of user data.
- **Bad Block Management:** This feature tracks all manufacturing and run-time bad blocks of flash media and replaces them with new ones from the spare pool.

2.4 Failure Rate

Table 3: Failure Rate

Failure Rate	8GB	16GB
FIT @ Tc = 72°C	39.88	59.95

2.5 Environmental Conditions

Table 4: Environmental Conditions and Test Conditions

Parameter	Value
Operating Temperature – Wide Temperature	-40°C to 105°C
Storage Temperature	-40°C to 105°C

2.6 Endurance

Table 5: Reliability Characteristics

Item	Value
Data Retention (@ 55°C)	10 years when 90% life remaining
	1 year when 10% life remaining
MLC mode Endurance ¹	8 GB (native) No pre-configuration
	16 GB (native) No pre-configuration
	100% Sequential Workload
	20 TBW
	40 TBW
Data Reliability ²	< 1E-15 uncorrectable bit error rate

¹ Endurance is directly related to the User specific workload.

² Reference from JESD218




3 PRODUCT DESCRIPTION

The eMMC device includes NAND Flash Memory paired with an intelligent embedded MMC controller which runs advanced firmware to manage the NAND media and utilizes the industry standard eMMC interface for easy device integration into any system using a processor with an MMC host.

3.1 Functional Block Diagram

Figure 1: eMMC Block Diagram

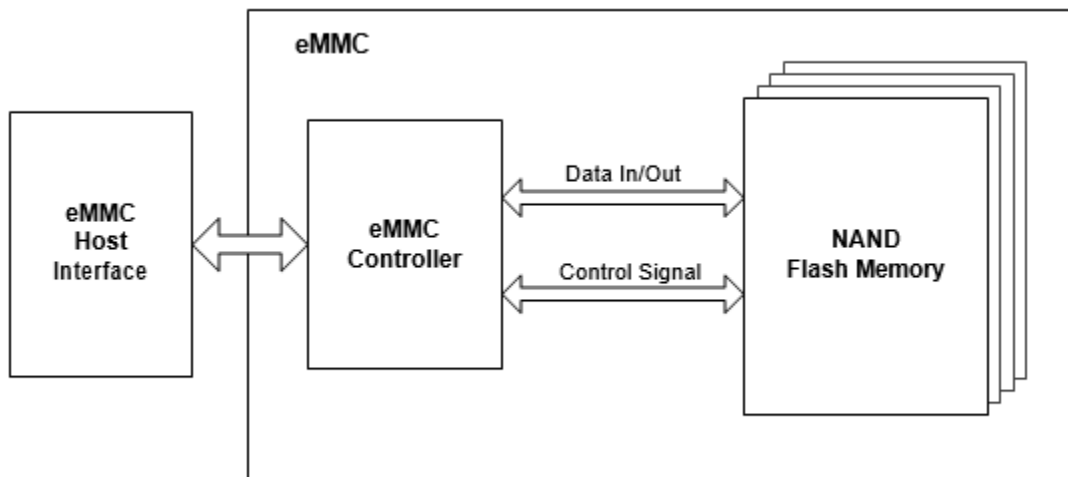



4 PACKAGE INFORMATION

4.1 Signal Interface

4.1.1 eMMC Ball-out Diagram

Figure 2: 153-Ball Pin Assignments (Top View, Balls Down)*

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	
A	NC	NC	DAT0	DAT1	DAT2	VSS	RFU	NC	NC	NC	NC	NC	NC	NC	A
B	NC	DAT3	DAT4	DAT5	DAT6	DAT7	NC	NC	NC	NC	NC	NC	NC	NC	B
C	NC	VDDI	NC	VSSQ	NC	VCCQ	NC	NC	NC	NC	NC	NC	NC	NC	C
D	NC	NC	NC	NC								NC	NC	NC	D
E	NC	NC	NC		RFU	VCC	VSS	RFU	RFU	RFU		NC	NC	NC	E
F	NC	NC	NC		VCC					RFU		NC	NC	NC	F
G	NC	NC	RFU		VSS					RFU		NC	NC	NC	G
H	NC	NC	NC		DS					VSS		NC	NC	NC	H
J	NC	NC	NC		VSS					VCC		NC	NC	NC	J
K	NC	NC	NC		RST_n	RFU	RFU	VSS	VCC	RFU		NC	NC	NC	K
L	NC	NC	NC									NC	NC	NC	L
M	NC	NC	NC	VCCQ	CMD	CLK	NC	NC	NC	NC	NC	NC	NC	NC	M
N	NC	VSSQ	NC	VCCQ	VSSQ	NC	NC	NC	NC	NC	NC	NC	NC	NC	N
P	NC	NC	VCCQ	VSSQ	VCCQ	VSSQ	RFU	NC	NC	RFU	NC	NC	NC	NC	P
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	



4.1.2 Signal Descriptions

Table 6: Signal Descriptions


Signal	Type	Description
CLK	Input	Clock Signal.
DS	Output	Data Strobe Signal, Used in HS400 mode.
CMD	I/O	Command Signal.
DAT0 – DAT7	I/O	Data Bus.
RST_n	Input	Hardware Reset Signal.
VCC	Supply	Supply voltage for controller and Flash memory power.
VCCQ	Supply	Supply voltage for controller and eMMC I/O power.
VSS	Supply	Supply voltage ground for controller and Flash memory. Can be short with VSSQ.
VSSQ	Supply	Supply voltage ground for controller and IO Flash memory. Can be short with VSS.
VDDi	-	Connect capacitor from VDDi to GND for stabilize internal power.
NC	-	In eMMC chip is no connect. Left it floating.
RFU	-	Reserved for future use. Left it floating for future use.



5 eMMC MECHANICAL SPECIFICATIONS

5.1 Package Dimensions

Figure 3: 153-Ball BGA Dimensions – 11.5 mm x 13 mm x 0.8 mm

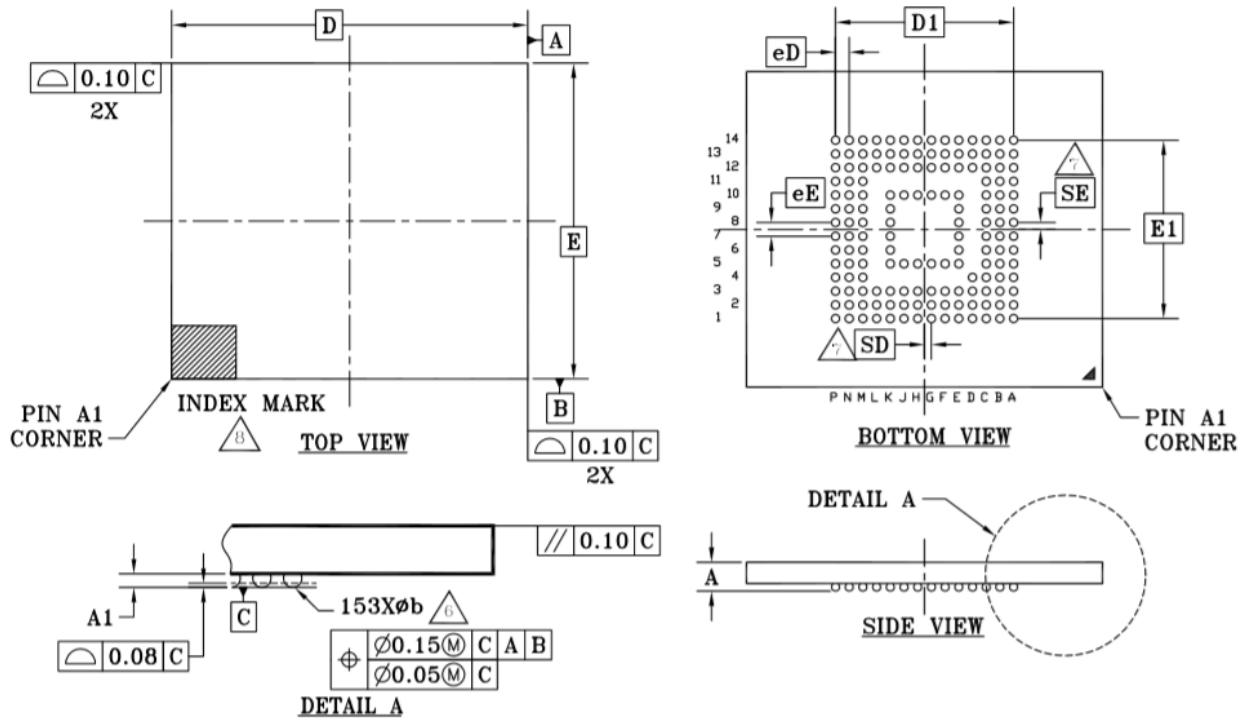

PACKAGE	TBD 153			NOTE
JEDEC	MO-276			
D X E	13.00mm X 11.50mm PACKAGE			
SYMBOL	MIN.	NOM.	MAX.	
A	0.70	---	0.80	PROFILE
A1	0.17	---	---	BALL HEIGHT
D	13.00 BSC			BODY SIZE
E	11.50 BSC			BODY SIZE
D1	6.50 BSC			MATRIX FOOTPRINT
E1	6.50 BSC			MATRIX FOOTPRINT
MD	14			MATRIX SIZE D DIRECTION
ME	14			MATRIX SIZE E DIRECTION
n	153			BALL COUNT
Øb	0.25	0.30	0.35	BALL DIAMETER
eE	0.50 BSC			BALL PITCH
eD	0.50 BSC			BALL PITCH
SD/SE	0.25 BSC			SOLDER BALL PLACEMENT
	D5-D11,E11-K11,L4-L11,E4-K4 F6-F9,G6-G9,H6-H9,J6-J9			DEPOPULATED SOLDER BALLS

NOTES:

- DIMENSIONING AND TOLERANCING METHODS PER ASME Y14.5-2009. THIS OUTLINE CONFORMS TO JEP 95, SECTION 4.6.
- ALL DIMENSIONS ARE IN MILLIMETERS.
- BALL POSITION DESIGNATION PER JEP 95, SECTION 3, SPP-020.
- [e] REPRESENTS THE SOLDER BALL GRID PITCH.
- SYMBOL "MD" IS THE BALL MATRIX SIZE IN THE "D" DIRECTION. SYMBOL "ME" IS THE BALL MATRIX SIZE IN THE "E" DIRECTION. n IS THE NUMBER OF POPULATED SOLDER BALL POSITIONS FOR MATRIX SIZE MD X ME.
- [6] DIMENSION "b" IS MEASURED AT THE MAXIMUM BALL DIAMETER IN A PLANE PARALLEL TO DATUM C.
- [7] [SD] AND [SE] ARE MEASURED WITH RESPECT TO DATUMS A AND B AND DEFINE THE POSITION OF THE CENTER SOLDER BALL IN THE OUTER ROW. WHEN THERE IS AN ODD NUMBER OF SOLDER BALLS IN THE OUTER ROW [D] OR [SE] = 0.000. WHEN THERE IS AN EVEN NUMBER OF SOLDER BALLS IN THE OUTER ROW [SD] OR [SE] = [e]/2
- [8] A1 CORNER TO BE IDENTIFIED BY CHAMFER, LASER OR INK MARK, METALLIZED MARK INDENTATION OR OTHER MEANS.
- TEST PADS MAY BE PRESENT BUT ARE NOT SHOWN. THEY ARE FOR INTERNAL USE ONLY AND ARE NOT SOLDER BALLS.



5.2 Recommended Reflow Profiles

Table 7: Recommended Reflow Profile

Reflow Parameters	Suggested Range
Peak Temperature	235 - 245°C
Time Above liquidus	45 to 70 seconds
Cooling Rate	< 4°C/sec

Note: Each solder paste manufacturer will have their own reflow profile specification. It's recommended customers follow the solder paste manufacturer's reflow profile specification and optimize the reflow profile based on product complexity for the assembly process.




6 ELECTRICAL SPECIFICATION

6.1 Electrical Interface

The device current consumption for various device configurations is defined in the power class fields of the ECSD register.

V_{CC} is used for the NAND Flash device; V_{CCQ} is used for the controller and the eMMC interface voltage.

Figure 4: System Architecture

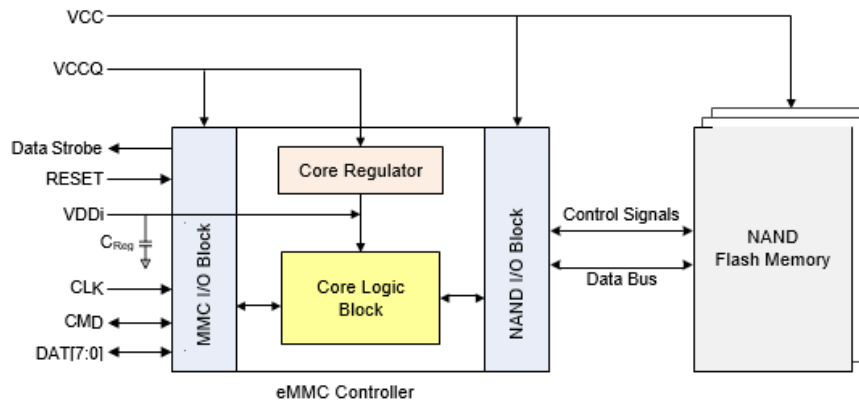

6.2 DC Specifications

Table 8: Power Requirements

Symbol	Parameter	Value (Minimum)	Value (Typical)	Value (Maximum)	Unit
V_{CC}	Voltage supply to Flash memory	2.7	3.3	3.6	V
V_{CCQ}	Voltage supply to host interface	1.70	1.80	1.95	V
V_{DDi}	Internal voltage regulator connection to external capacitor	-	-	-	-



Figure 5: Recommended eMMC Connection

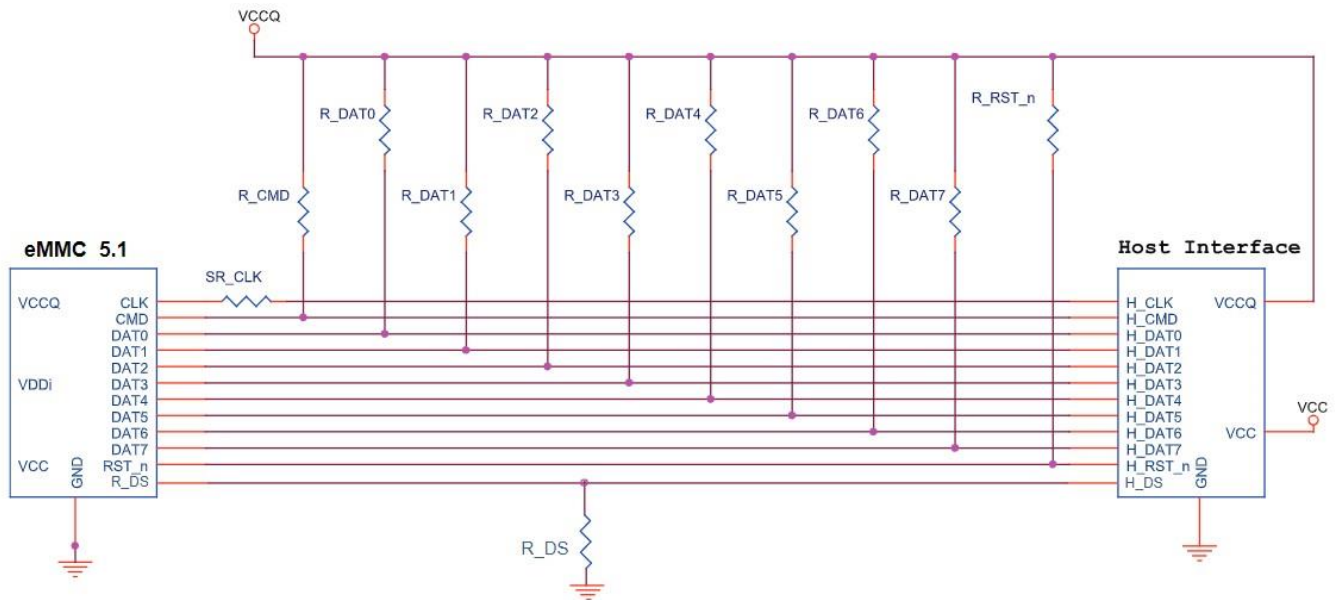


Table 9: Recommended Capacitor and Resistor

Parameter	Symbol	Recommended	Comments
Pull-up resistance for CMD	R_CMD	10 kΩ	To prevent bus floating.
Pull-up resistance for DAT[7:0]	R_DAT	50 kΩ	To prevent bus floating.
Pull-up resistance for RST_n	R_RST_n	50 kΩ	A pull-up resistance on the RST_n (H/W reset) line is not required if the host does not enable the H/W reset feature.
Series termination for CLK	SR_CLK	22Ω	To stabilize the clock signal. It is recommend for customers to perform simulations using the controller IBIS model to confirm this value.
Pull-Down resistance for Data Strobe	R_DS	50 kΩ	

Decoupling Capacitor Recommendations

- X7R or X5R capacitors are recommended with a rated voltage > 6.3V.
- 0603 or a smaller size is recommended.
- Pick capacitors with low ESL and ESR.
- It is important to place decoupling caps as close to the target supply balls while maintaining > 20 mil trace width for supply connections to capacitor SMT pads.
- Recommended Value and Quantity:
VCCQ: More than 0.1 μF x 1, 2.2 μF x 1 (for BGA153, this cap should be as close as possible to C6 ball), and 1 x 1 μF
VCC: More than 0.1 μF x 1 and 2.2 μF x 1
VDDi: More than 0.1 μF x 1 and 2.2 μF x 1
A minimum of 1uF is required for VCCQ, VCC, and VDDi.

Customer is requested to place all of the caps shown above. For VCCQ caps, they should be located as close as possible to the VCCQ/VSSQ balls near the DAT0-7 signals.



7 REGISTER

The registers used in the SMART eMMC are shown in the table below. These registers are described in the sections that follow:

Table 10: Supported Device Registers

Name	Width	Description
CID	128 (Bits)	Card Identification
OCR	32 (Bits)	Operation Condition Register
CSD	128 (Bits)	Card Specific Data
ECSD	512 (Bytes)	Extended Card Specific Data

* The values in each register are based on MLC configuration.

7.1 CID Register

The card identification (CID) register is 128 bits wide. It contains the device identification information used during the card identification phase as required by the eMMC protocol. Each device is created with a unique identification number.

Table 11: CID Register Field Parameters

Name	Field	Width (Bits)	CID Bits	SMART CID Value
Manufacturer ID	MID	8	[127:120]	01h
Reserved	-	6	[119:114]	01b
Device / BGA	CBX	2	[113:112]	00h
OEM/application ID	OID	8	[111:104]	See product table
Product name	PNM	48	[103:56]	(Note3)
Product revision	PRV	8	[55:48]	32-bit unsigned binary integer assigned at random
Product serial number	PSN	32	[47:16]	(Note 1)
Manufacturing date	MDT	8	[15:8]	(Note 2)
CRC7 checksum	CRC	7	[7:1]	Always 1
reserved	-	1	0	01h

Note:

- ¹ Descriptions follow JEDEC e.MMC Standard Specifications.
- ² The CRC7 checksum (7 bits). This is the checksum of the CID contents computed according to 0.
- ³ Product Revision is a combination of Controller and Firmware Revisions.



7.2 OCR Register

The card identification (OCR) register is 128 bits wide. It contains the device identification information used during the card identification phase as required by the eMMC protocol. Each device is created with a unique identification number.

Table 12: OCR Register Field Definitions

V _{DD} Voltage Window	Width (Bits)	OCR Bits	OCR Value
Ready/Busy	1	[31]	card power up status bit (busy) ⁽¹⁾
Access Mode	2	[30:29]	10b
Reserved	5	[28:24]	--
2.7-3.6V	9	[23:15]	1 1111 1111b
2.0-2.6V	7	[14:8]	000 0000b
1.70-1.95V	1	[7]	1b
Reserved	7	[6:0]	--

Note:

- (1) This bit is set to low if the device has not finished the power up routine.

7.3 CSD Register

The card-specific data (CSD) register provides information about accessing the device contents. The CSD register defines the data format, error correction type, maximum data access time, and data transfer speed, as well as whether the DS register can be used. The programmable part of the register (entries marked with W or E in the following table) can be changed by the PROGRAM_CSD (CMD27) command.



Table 13: CSD Register Field Parameters

Name	Field	Width (Bits)	CSD Bits	CSD Value
CSD structure	CSD_STRUCTURE	2	[127:126]	3h
System specification version	SPEC_VERS	4	[125:122]	4h
Reserved	--	2	[121:120]	—
Data read access time 1	TAAC	8	[119:112]	27h
Data read access time 2 in CLK cycles (NSAC x 100)	NSAC	8	[111:104]	01h
Maximum bus clock frequency	TRAN_SPEED	8	[103:96]	32h
Device command classes	CCC	12	[95:84]	0F5h
Maximum read data block length	READ_BL_LEN	4	[83:80]	9h
Partial blocks for reads supported	READ_BL_PARTIAL	1	[79]	0h
Write block misalignment	WRITE_BLK_MISALIGN	1	[78]	0h
Read block misalignment	READ_BLK_MISALIGN	1	[77]	0h
DSR implemented	DSR_IMP	1	[76]	0h
Reserved	--	2	[75:74]	—
Device size	C-SIZE	12	[73:62]	FFFh
Maximum read current as VDD,min	VDD_R_CURR_MIN	3	[61:59]	7h
Maximum read current as VDD,max	VDD_R_CURR_MAX	3	[58:56]	7h
Maximum write current as VDD,min	VDD_W_CURR_MIN	3	[55:53]	7h
Maximum write current as VDD,max	VDD_W_CURR_MAX	3	[52:50]	7h
Device size multiplier	C-SIZE_MULT	3	[49:47]	7h
Erase group size	ERASE_GRP_SIZE	5	[46:42]	1Fh
Erase group size multiplier	ERASE_GRP_SIZE_MULT	5	[41:37]	1Fh
Write protect group size	WP_GRP_SIZE	5	[36:32]	0Fh
Write protect group enable	WP_GRP_ENABLE	1	[31]	1h
Manufacturer default ECC	DEFAULT_ECC	2	[30:29]	0h
Write-speed factor	R2W_FACTOR	3	[28:26]	2h
Maximum write data block length	WRITE_BL_LEN	4	[25:22]	9h
Partial blocks for write allowed	WRITE_BL_PARTIAL	1	[21]	0h
Reserved	--	4	[20:17]	—
Content protection application	CONTENT_PROT_APP	1	[16]	0h
File-format group	FILE_FORMAT_GRP	1	[15]	0h
Copy flag (OTP)	COPY	1	[14]	1h



Name	Field	Width (Bits)	CSD Bits	CSD Value
Permanent write protection	PERM_WRITE_PROTECT	1	[13]	0h
Temporary write protection	TEMP_WRITE_PROTECT	1	[12]	0h
File format	FILE_FORMAT	2	[11:10]	0h
ECC code	ECC	2	[9:8]	0h
CRC	CRC	7	[7:1]	Note4
Not used; always 1	--	1	[0]	Always 1

7.4 ECSD Register

The 512-byte extended card-specific data (ECSD) register defines device properties and selected modes. The most significant 320 bytes are the properties segment. This segment defines device capabilities and cannot be modified by the host. The lower 192 bytes are the modes segment. The modes segment defines the configuration in which the device is working. The host can change the properties of modes segments using the SWITCH command.



Table 14: ECSD Register Field Parameters

Name	Field	Size (Bytes)	Cell Type ⁽¹⁾	ECSD Bytes	ECSD Values
Reserved	--	6	--	[511:506]	--
Extended Security Commands Error	EXT_SECURITY_ERR	1	R	[505]	0x00
Supported command sets	S_CMD_SET	1	R	[504]	0x01
HPI features	HPI_FEATURES	1	R	[503]	0x01
Background operations support	BKOPS_SUPPORT	1	R	[502]	0x01
Max packed read commands	MAX_PACKED_READS	1	R	[501]	0x20
Max packed write commands	MAX_PACKED_WRITES	1	R	[500]	0x20
Data tag support	DATA_TAG_SUPPORT	1	R	[499]	0x01
Tag unit size	TAG_UNIT_SIZE	1	R	[498]	0x00
Tag resources size	TAG_RES_SIZE	1	R	[497]	0x00
Context management capabilities	CONTEXT_CAPABILITIES	1	R	[496]	0x78
Large unit size	LARGE_UNIT_SIZE_M1	1	R	[495]	0x01
Extended partitions attribute support	EXT_SUPPORT	1	R	[494]	0x03
Supported Modes	SUPPORTED_MODES	1	R	[493]	0x01
FFU features	FFU_FEATURES	1	R	[492]	0x00
Operations code timeout	OPERATION_CODE_TIMEOUT	1	R	[491]	0x17
FFU Argument	FFU_ARG	4	R	[490:487]	0xFFFAFFF0
Reserved	--	181	--	[486:309]	--
CMD Queuing Support	CMDQ_SUPPORT	1	R	[308]	0x0
CMD Queuing Depth	CMDQ_DEPTH	1	R	[307]	0x00
Reserved	--	1	--	[306]	--
Number of FW sectors correctly programmed	NUMBER_OF_FW_SECTORS_CORRECTLY_PROGRAMMED	4	R	[305:302]	0x00
Vendor proprietary health report	VENDOR_PROPRIETARY_HEALTH_REPORT	32	R	[301:270]	N/A
Device life time estimation type B	DEVICE_LIFE_TIME_EST_TYP_B	1	R	[269]	Variable
Device life time estimation type A	DEVICE_LIFE_TIME_EST_TYP_A	1	R	[268]	Variable
Pre EOL information	PRE_EOL_INFO	1	R	[267]	Variable
Optimal read size	OPTIMAL_READ_SIZE	1	R	[266]	0x40
Optimal write size	OPTIMAL_WRITE_SIZE	1	R	[265]	0x40
Optimal trim unit size	OPTIMAL_TRIM_UNIT_SIZE	1	R	[264]	0x07



Name	Field	Size (Bytes)	Cell Type ⁽¹⁾	ECSD Bytes	ECSD Values
Device Version	Device version	2	R	[263:262]	0x3805 (For 8GB) 0x4105 (For 16GB)
Firmware version	FIRMWARE_VERSION	8	R	[261:254]	.. ⁽¹⁾
Power class for 200MHz, DDR at VCC=3.6V	PWR_CL_DDR_200_360	1	R	[253]	0x00
Cache size	CACHE_SIZE	4	R	[252:249]	0x400
Generic CMD6 timeout	GENERIC_CMD6_TIME	1	R	[248]	0x05
Power off notification (long) timeout	POWER_OFF_LONG_TIME	1	R	[247]	0x64
Background operations status	BKOPS_STATUS	1	R	[246]	0x00
Number of correctly programmed sectors	CORRECTLY_PRG_SECTORS_NUM	4	R	[245:242]	0x00
First initialization time after partitioning	INI_TIMEOUT_AP	1	R	[241]	0x0A
Reserved	--	1	--	[240]	--
Power class for 52 MHz, DDR at 3.6V	PWR_CL_DDR_52_360	1	R	[239]	0x00
Power class for 52 MHz, DDR at 1.95V	PWR_CL_DDR_52_195	1	R	[238]	0x00
Power class for 200 MHz at 1.95V, VCC = 3.6V	PWR_CL_200_195	1	R	[237]	0x00
Power class for 200 MHz at 1.3V, VCC = 3.6V	PWR_CL_200_130	1	R	[236]	0x00
Minimum write performance for 8-bit at 52 MHz in DDR mode	MIN_PERF_DDR_W_8_52	1	R	[235]	0x00
Minimum read performance for 8-bit at 52 MHz in DDR mode	MIN_PERF_DDR_R_8_52	1	R	[234]	0x00
Reserved	--	1	--	[233]	--
TRIM multiplier	TRIM_MULT	1	R	[232]	0x02
Secure feature support	SEC_FEATURE_SUPPORT	1	R	[231]	0x55
SECURE ERASE multiplier	SEC_ERASE_MULT	1	R	[230]	0x19
SECURE TRIM multiplier	SEC_TRIM_MULT	1	R	[229]	0x0A
Boot information	BOOT_INFO	1	R	[228]	0x07
Reserved	--	1	--	[227]	--
Boot partition size	BOOT_SIZE_MULT	1	R	[226]	0x20
Access size	ACC_SIZE	1	R	[225]	0x06



Name	Field	Size (Bytes)	Cell Type ⁽¹⁾	ECSD Bytes	ECSD Values
High-capacity erase unit size	HC_ERASE_GRP_SIZE	1	R	[224]	0x01
High-capacity erase timeout	ERASE_TIMEOUT_MULT	1	R	[223]	0x02
Reliable write-sector count	REL_WR_SEC_C	1	R	[222]	0x01
High-capacity write protect group size	HC_WP_GRP_SIZE	1	R	[221]	0x10
Sleep current (V _{CC})	S_C_VCC	1	R	[220]	0x07
Sleep current (V _{CCQ})	S_C_VCCQ	1	R	[219]	0x07
Production state awareness timeout	PRODUCTION_STATE_AWARENESS_TIMEOUT	1	R	[218]	0x17
Sleep/awake timeout	S_A_TIMEOUT	1	R	[217]	0x12
Sleep Notification Timeout	SLEEP_NOTIFICATION_TIME	1	R	[216]	0x0C
Sector count	SEC-COUNT	4	R	[215:212]	0x00E90000 for 8GB 0x01D20000 for 16GB
Reserved	--	1	--	[211]	--
Minimum write performance for 8-bit at 52 MHz	MIN_PERF_W_8_52	1	R	[210]	0x00
Minimum read performance for 8-bit at 52 MHz	MIN_PERF_R_8_52	1	R	[209]	0x00
Minimum write performance for 8-bit at 26 MHz and 4-bit at 52 MHz	MIN_PERF_W_8_26_4_52	1	R	[208]	0x00
Minimum read performance for 8-bit at 26 MHz and 4-bit at 52 MHz	MIN_PERF_R_8_26_4_52	1	R	[207]	0x00
Minimum write performance for 4-bit at 26 MHz	MIN_PERF_W_4_26	1	R	[206]	0x00
Minimum read performance for 4-bit at 26 MHz	MIN_PERF_R_4_26	1	R	[205]	0x00
Reserved	--	1	--	[204]	--
Power class for 26 MHz at 3.6V 1 R	PWR_CL_26_360	1	R	[203]	0x00
Power class for 52 MHz at 3.6V 1 R	PWR_CL_52_360	1	R	[202]	0x00
Power class for 26 MHz at 1.95V 1 R	PWR_CL_26_195	1	R	[201]	0x00
Power class for 52 MHz at 1.95V 1 R	PWR_CL_52_195	1	R	[200]	0x00
Partition switching timing	PARTITION_SWITCH_TIME	1	R	[199]	0x04
Out-of-interrupt busy timing	OUT_OF_INTERRUPT_TIME	1	R	[198]	0x0A
I/O driver strength	DRIVER_STRENGTH	1	R	[197]	0x1F



Name	Field	Size (Bytes)	Cell Type ⁽¹⁾	ECSD Bytes	ECSD Values
Card type	CARD_TYPE	1	R	[196]	0x57
Reserved	--	1	--	[195]	--
CSD structure version	CSD_STRUCTURE	1	R	[194]	0x02
Reserved	--	1	--	[193]	--
Extended CSD revision	EXT_CSD_REV	1	--	[192]	0x08
Command set	CMD_SET	1	R/W/E_P	[191]	0x00
Reserved	--	1	--	[190]	--
Command set revision	CMD_SET_REV	1	R	[189]	0x00
Reserved	--	1	--	[188]	--
Power class	POWER_CLASS	1	R/W/E_P	[187]	0x00
Reserved	--	1	--	[186]	--
High-speed interface timing	HS_TIMING	1	R/W/E_P	[185]	0x00
Reserved	--	1	--	[184]	--
Bus width mode	BUS_WIDTH	1	W/E_P	[183]	0x00
Reserved	--	1	--	[182]	--
Erased memory content	ERASED_MEM_CONT	1	R	[181]	0x00
Reserved	--	1	--	[180]	--
Partition configuration	PARTITION_CONFIG	1	R/W/E, R/W/E_P	[179]	0x00
Boot config protection	BOOT_CONFIG_PROT	1	R/W, R/W/C_P	[178]	0x00
Boot bus Conditions	BOOT_BUS_CONDITIONS	1	R/W/E	[177]	0x00
Reserved	--	1	--	[176]	--
High-density erase group definition	ERASE_GROUP_DEF	1	R/W/E_P	[175]	0x00
Boot write protection status registers	BOOT_WP_STATUS	1	R	[174]	0x00
Boot area write protection register	BOOT_WP	1	R/W, R/W/C_P	[173]	0x00
Reserved	--	1	-	[172]	--
User write protection register	USER_WP	1	R/W, R/W/C_P, R/W/E_P	[171]	0x00
Reserved	--	1	--	[170]	--
Firmware configuration	FW_CONFIG	1	R/W	[169]	0x00



Name	Field	Size (Bytes)	Cell Type ⁽¹⁾	ECSD Bytes	ECSD Values
RPMB size	RPMB_SIZE_MULT	1	R	[168]	0x20
Write reliability setting register	WR_REL_SET	1	R/W	[167]	0x1F
Write reliability parameter register	WR_REL_PARAM	1	R	[166]	0x15
Start sanitize operation	SANITIZE_START	1	W/E_P	[165]	0x00
Manually start background operations	BKOPS_START	1	W/E_P	[164]	0x00
Enable background operations handshake	BKOPS_EN	1	R/W	[163]	0x02
Hardware reset function	RST_n_FUNCTION	1	R/W	[162]	0x00
HPI management	HPI_MGMT	1	R/W/E/P	[161]	0x00
Partitioning support	PARTITIONING_SUPPORT	1	R/W/E, R/W/E_P	[160]	0x07
Maximum enhanced area size	MAX_ENH_SIZE_MULT	3	R	[159:157]	0x0001D2 (For 8GB) 0x0003A4 (For 16GB)
Partitions attribute	PARTITIONS_ATTRIBUTE	1	R/W	[156]	0x00
Partitioning setting	PARTITIONING_SETTING-COMPLETED	1	R/W	[155]	0x00
General-purpose partition size	GP_SIZE_MULT	12	R/W	[154:143]	0x00
Enhanced user data area size	ENH_SIZE_MULT	3	R/W	[142:140]	0x00
Enhanced user data start address	ENH_START_ADDR	4	R/W	[139:136]	0x00
Reserved	-	1	-	[135]	--
Bad block management mode	SEC_BAD_BLK_MGMNT	1	R/W	[134]	0x00
Production state awareness	PRODUCTION_STATE_AWARENESS	1	R/W/E	[133]	0x00
Package case temperature is controlled	TCASE_SUPPORT	1	W/E_P	[132]	0x00
Periodic wake-up	PERIODIC_WAKEUP	1	R/W/E	[131]	0x00
Program CID/CSD in DDR mode support	PROGRAM_CID_CSD_DDR_SUPPORT	1	R	[130]	01h
Reserved	-	2	-	[129:128]	--
Vendor specific fields	VENDOR_SPECIFIC_NFIELD	64	<vs>	[127:64]	0x00
Native sector size	NATIVE_SECTOR_SIZE	1	R	[63]	0x01
Sector size emulation	USE_NATIVE_SECTOR	1	R/W	[62]	0x00
Sector size	DATA_SECTOR_SIZE	1	R	[61]	0x00



Name	Field	Size (Bytes)	Cell Type ⁽¹⁾	ECSD Bytes	ECSD Values
1st initialization after disabling sector size emulation	INI_TIMEOUT_EMU	1	R	[60]	0x0A
Class 6 command control	CLASS_6_CTRL	1	R/W/E_P	[59]	0x00
Number of addressed groups to be released	DYNCAP_NEEDED	1	R	[58]	0x00
Exception events control	EXCEPTION_EVENTS_CTRL	2	R/W/E_P	[57:56]	0x00
Exception events status	EXCEPTION_EVENTS_STATUS	2	R	[55:54]	0x00
Extended partitions attribute	EXT_PARTITIONS_ATTRIBUTE	2	R/W	[53:52]	0x00
Context configuration	CONTEXT_CONF	15	R/W/E_P	[51:37]	0x00
Packed command status	PACKED_COMMAND_STATUS	1	R	[36]	0x00
Packed command failure index	PACKED_FAILURE_INDEX	1	R	[35]	0x00
Power off notification	POWER_OFF_NOTIFICATION	1	R/W/E_P	[34]	0x00
Control to turn the cache on/off	CACHE_CTRL	1	R/W/E_P	[33]	0x00
Flushing of the cache	FLUSH_CACHE	1	W/E_P	[32]	0x00
Control to turn the Barrier ON/OFF	BARRIER_CTRL	1	R/W	[31]	0x00
Mode config	MODE_CONFIG	1	R/W/E_P	[30]	0x00
Mode operation codes	MODE_OPERATION_CODES	1	W/E_P	[29]	0x00
Reserved	-	2	-	[28:27]	--
FFU status	FFU_STATUS	1	R	[26]	0x00
Pre loading data size	PRE_LOADING_DATA_SIZE	4	R/W/E_P	[25:22]	0x00
Max pre loading data size	MAX_PRE_LOADING_DATASIZE	4	R	[21:18]	0xE900000 (For 8GB) 0x1D20000 (For 16GB)
Product state awareness enablement	PRODUCT_STATE_AWARENESS_ENABLEMENT	1	R/W/E & R	[17]	01h
Secure removal type	SECURE_REMOVAL_TYPE	1	R/W & R	[16]	3Bh
Reserved	-	16	-	[15:0]	--

(1) Note: FIRMWARE_VERSION depends on capacity.




8 PART NUMBERS

Table 14: Part Numbering Information

Capacity	Part Number
8GB	KTM8GH2AHW01
16GB	KTMAGH2AHW01



8.1 Part Number Decoder

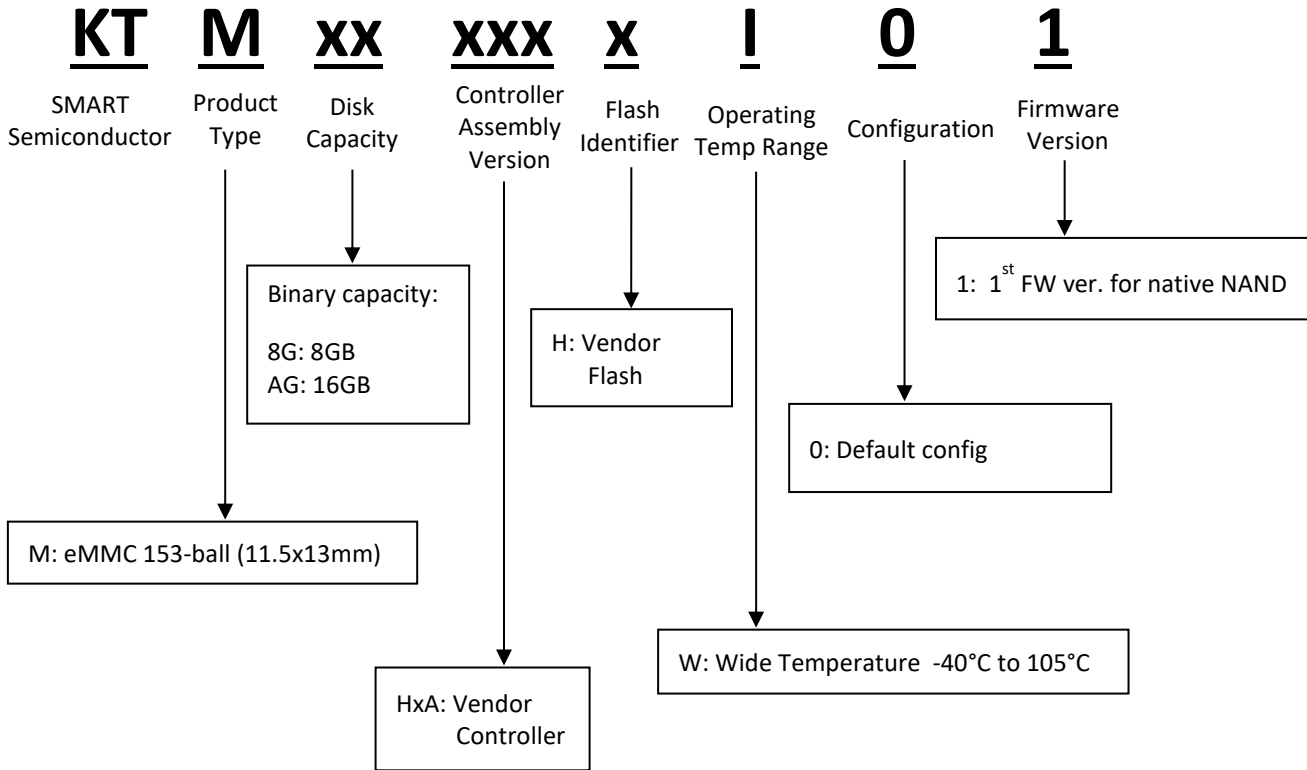

Note:

¹ Actual Firmware Revision as reported in ECSD [257:254] in ASCII



Disclaimer:

No part of this document may be copied or reproduced in any form or by any means, or transferred to any third party, without the prior written consent of an authorized representative of SMART Semiconductor. ("SMARTsemi"). The information in this document is subject to change without notice. SMARTsemi assumes no responsibility for any errors or omissions that may appear in this document, and disclaims responsibility for any consequences resulting from the use of the information set forth herein. SMARTsemi makes no commitments to update or to keep current information contained in this document. The products listed in this document are not suitable for use in applications such as, but not limited to, aircraft control systems, aerospace equipment, submarine cables, nuclear reactor control systems, and life support systems. Moreover, SMARTsemi does not recommend or approve the use of any of its products in life support devices or systems, or in any application where failure could result in injury or death. If a customer wishes to use SMARTsemi products in applications not intended by SMARTsemi, said customer must contact an authorized SMARTsemi representative to determine SMARTsemi's willingness to support a given application. The information set forth in this document does not convey any license under the copyrights, patent rights, trademarks, or other intellectual property rights claimed and owned by SMARTsemi. The information set forth in this document is considered to be "Proprietary" and "Confidential" property owned by SMARTsemi.

ALL PRODUCTS SOLD BY SMARTSEMI ARE COVERED BY THE PROVISIONS APPEARING IN SMARTSEMI'S TERMS AND CONDITIONS OF SALE ONLY, INCLUDING THE LIMITATIONS OF LIABILITY, WARRANTY, AND INFRINGEMENT PROVISIONS. SMARTSEMI MAKES NO WARRANTIES OF ANY KIND, EXPRESS, STATUTORY, IMPLIED, OR OTHERWISE, REGARDING INFORMATION SET FORTH HEREIN OR REGARDING THE FREEDOM OF THE DESCRIBED PRODUCTS FROM INTELLECTUAL PROPERTY INFRINGEMENT, AND EXPRESSLY DISCLAIMS ANY SUCH WARRANTIES INCLUDING WITHOUT LIMITATION ANY EXPRESS, STATUTORY, OR IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

©2023 SMART Semiconductor. All rights reserved.