



SMARTsemiTM

SMARTsemi Memory IC Datasheet

Industrial Grade eMMC 153b

November 2024

Rev 0.6

Doc: DS708

REVISION HISTORY

Date	Revision	Section(s)	Description
July 2022	0.1	All	Initial Release
October 2022	0.2	All	Add 8GB Density
December 2022	0.3	All	Update Power Consumption
March 2023	0.4	Part Number Decoder	Update for variables
June 2023	0.5	Recommended Reflow Profiles	Update Recommended Values
November 2024	0.6	Part Numbers	Update Part Numbering Information and add Packaging Information



ESD Caution – Handling

Static electricity may be discharged through this disk subsystem. In extreme cases, this may temporarily interrupt the operation or damage components. To prevent this, make sure you are working in an ESD-safe environment. For example, before handling the disk subsystem, touch a grounded device, such as a computer case, prior to handling.

© 2024 SMARTsemi™. All rights reserved.

©2024 SMARTsemi™ - Confidential

Rev: 0.6

DS708

TABLE OF CONTENTS

1 GENERAL DESCRIPTION	6
1.1 Overview	6
1.2 Features.....	7
2 OPERATIONAL CHARACTERISTICS	10
2.1 Performance	10
2.2 Power Consumption.....	11
2.3 Data Reliability	11
2.4 Failure Rate	11
2.5 Environmental Conditions	11
2.6 Endurance.....	12
3 PRODUCT DESCRIPTION.....	13
3.1 Functional Block Diagram	13
4 PACKAGE INFORMATION.....	14
4.1 Signal Interface	14
4.1.1 eMMC Ball-out Diagram	14
4.1.2 Signal Descriptions.....	15
5 eMMC MECHANICAL SPECIFICATIONS.....	17
5.1 Package Dimensions	17
5.2 Recommended Reflow Profiles	18
6 ELECTRICAL SPECIFICATION.....	19
6.1 Electrical Interface.....	19
6.2 DC Specifications.....	19
7 REGISTER	22
7.1 CID Register	22
7.2 OCR Register.....	23
7.3 CSD Register	23
7.4 ECSD Register.....	25
8 PART NUMBERS.....	33
8.1 Part Number Decoder	34
8.2 Packaging Information.....	35

LIST OF FIGURES

Figure 1: eMMC Block Diagram	13
Figure 2: 153-Ball Pin Assignments (Top View, Balls Down)*	14
Figure 3: 153-Ball BGA Dimensions – 11.5 mm x 13 mm x 0.8 mm.....	17
Figure 4: System Architecture.....	19
Figure 5: Recommended eMMC Connection	20

LIST OF TABLES

Table 1: Performance Table.....	10
Table 2: Current Consumption	11
Table 3: Failure Rate	11
Table 4: Environmental Conditions and Test Conditions	11
Table 5: Reliability Characteristics	12
Table 6: Signal Descriptions	15
Table 7: Recommended Reflow Profile.....	18
Table 8: Power Requirements.....	19
Table 9: Recommended Capacitor and Resistor.....	20
Table 10: Supported Device Registers.....	22
Table 11: CID Register Field Parameters.....	22
Table 12: OCR Register Field Definitions.....	23
Table 13: CSD Register Field Parameters	24
Table 14: Part Numbering Information	33

1 GENERAL DESCRIPTION

1.1 Overview

SMARTsemi's eMMC Product Family is an embedded Flash storage solution in a small BGA package designed specifically for the most demanding applications. SMARTsemi's eMMC products address the need for enhanced reliability by incorporating on-board error detection and correction, Global wear leveling algorithms, and other data management techniques to provide reliable operation and maximum NAND media life expectancy over the product life cycle.

Additionally, the eMMC controller and firmware hide the increased complexities of NAND media from the host processor and allow for faster product development and time to market.

Target applications for SMARTsemi's eMMC solution include but are not limited to IoT, Set Top Box, Industrial and Networking appliances wanting a rugged yet cost effective high density mass storage solution.

1.2 Features

- Industrial Standard Interface
 - JEDEC / eMMC Standard Version 5.1 Compliant
- eMMC 5.1 Enhanced Features
 - 12-signal interface (including CMD, CLK, DS, DAT[7:0], and RST_n)
 - Programmable bus width: 1-bit, 4-bit, and 8-bit
 - Supports HS400 high speed interface timing mode
 - Up to 200MHz clock frequency
 - Supports eMMC Field firmware update (FFU)
 - Supports eMMC production state awareness (PSA)
 - Supports eMMC device health report
 - High-speed, Dual Data Rate Boot support
 - Supports Boot and Alternative Boot Mode
 - Replay Protected Memory Block (RPMB)
 - Trim, Sanitize, Discard, Secure Erase
 - High Priority Interrupt (HPI)
 - Background Operations, Garbage Collection and WearLeveling
 - Reliable Write
 - Supports Command Queuing
 - Supports Enhanced Strobe in HS400 Mode
 - Supports eMMC Background Operation Control
 - Supports Lock/Unlock
 - Supports Secure Removal Type
 - Supports Configurable Drive Strength
 - Supports Write protect, Secure Write Protection
 - Supports Cache, Cache Barrier, Cache Flushing Report
 - Hardware/ Software Reset
 - Supports PON, Sleep/Awake
- Robust Data Protection and Endurance
 - Configurable ECC engine with zero overhead pipeline greatly reduces data loss rates and increases data endurance
 - Static data refresh and early block failure monitoring/retirement ensure the data reliability
 - Power loss detection and mapping table auto-rebuild algorithm support power-down data protection
 - Global wear leveling maximizes product lifespan with minimal wear leveling and write amplification overhead

- Supply Voltage
 - eMMC Interface Power (VCCQ): 1.70-1.95V
 - eMMC Interface Power (VCCQ): 2.7-3.6V¹
 - NAND Memory Power (VCC): 2.7-3.6V
- Dynamic power management technology enables multiple power saving modes
- Multiple Densities and Packages
 - Available in 4GB/8GB MLC mode density
 - 153-ball standard BGA packages
 - Green Package, REACH and RoHS Compliant
- Operating Temperature
 - Industrial Grade: -40°C ~ +85°C

Note: ¹ HS200 and HS400 mode are not supported when VCCQ is in 2.7-3.6V.

2 OPERATIONAL CHARACTERISTICS

All listed values are typical unless otherwise stated.

2.1 Performance

Table 1: Performance Table

MLC Partition Performance

Capacity	HS400 Performance MLC MODE			
	Seq. Read (MB/s)	Seq. Write (MB/s)	Random Read 4KB (IOPS)	Random Write 4KB (IOPS)
4 GB (native) No pre-configuration	170	15	5345	980
8 GB (native) No pre-configuration	250	65	10000	2000

Capacity	HS200 Performance MLC MODE			
	Seq. Read (MB/s)	Seq. Write (MB/s)	Random Read 4KB (IOPS)	Random Write 4KB (IOPS)
4 GB (native) No pre-configuration	155	15	4890	980
8 GB (native) No pre-configuration	180	65	9800	2000

Capacity	DDR52 Performance MLC MODE			
	Seq. Read (MB/s)	Seq. Write (MB/s)	Random Read 4KB (IOPS)	Random Write 4KB (IOPS)
4 GB (native) No pre-configuration	95	15	4610	980
8 GB (native) No pre-configuration	95	65	8000	2200

(1) Test condition: Testmetrix VTESA-4100E; bus in x8 I/O mode.

2.2 Power Consumption

Table 2: Current Consumption

Test Item	Capacity	MLC					
		ICCQ (mA)			ICC (mA)		
		DDR52	HS200	HS400	DDR52	HS200	HS400
Write Current	4 GB (native) No pre-configuration	43	43	43	32	33	33
Read Current		145	100	110	49	89	92
Idle		470 (uA)			110 (uA)		
Write Current	8 GB (native) No pre-configuration	80	80	82	42	58	59
Read Current		145	130	144	47	88	111
Idle		470 (uA)			110 (uA)		

(1) Bus in x8 I/O mode; 25°C; V_{CCQ} = 1.95 V in HS200 and HS400; V_{CCQ} = 3.6V in DDR52. Measurements done as maximum RMS current consumption over 100 milliseconds.

2.3 Data Reliability

- Static and Dynamic Wear Leveling:** This feature eliminates overstressing Flash media by spreading the data writes across all Flash physical address space, including logical areas that are not written by the user. The data is wear leveled across the entire drive.
- ECC:** Utilize LDPC ECC to provide correction of user data.
- Bad Block Management:** This feature tracks all manufacturing and run-time bad blocks of flash media and replaces them with new ones from the spare pool.

2.4 Failure Rate

Table 3: Failure Rate

Failure Rate ⁽¹⁾	All capacities
FIT @55°C	62.17 (153ball)

(1) The FIT data generated from high temperature experiment: Sample size = 77ea, 1 Lot.

2.5 Environmental Conditions

Table 4: Environmental Conditions and Test Conditions

Parameter	Value
Operating Temperature – Industrial Grade	-40°C to 85°C

Storage Temperature	-40°C to 85°C
---------------------	---------------

2.6 Endurance

Table 5: Reliability Characteristics

Item	Value	
Data Retention (@ 40°C)	10 years when 90% life remaining	
	1 year when 10% life remaining	
MLC mode Endurance ¹	4 GB (native) No pre-configuration	10.5 TBW
	8 GB (native) No pre-configuration	21 TBW
Data Reliability ²	< 1E-15 uncorrectable bit error rate	

¹ Endurance is directly related to the User specific workload.


² Reference from JESD218

3 PRODUCT DESCRIPTION

The eMMC device includes NAND Flash Memory paired with an intelligent embedded MMC controller which runs advanced firmware to manage the NAND media and utilizes the industry standard eMMC interface for easy device integration into any system using a processor with an MMC host.

3.1 Functional Block Diagram

Figure 1: eMMC Block Diagram

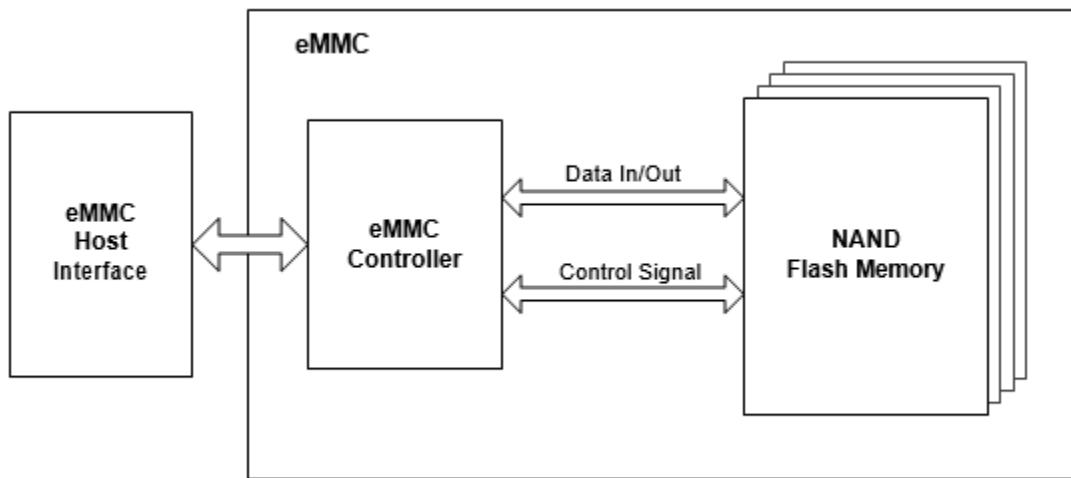



4 PACKAGE INFORMATION

4.1 Signal Interface

4.1.1 eMMC Ball-out Diagram

Figure 2: 153-Ball Pin Assignments (Top View, Balls Down)*

	1	2	3	4	5	6	7	8	9	10	11	12	13	14
A	NC	NC	DAT0	DAT1	DAT2	VSS	RFU	NC	NC	NC	NC	NC	NC	NC
B	NC	DAT3	DAT4	DAT5	DAT6	DAT7	NC	NC	NC	NC	NC	NC	NC	NC
C	NC	VDDQ	NC	VSSQ	NC	VCCQ	NC	NC	NC	NC	NC	NC	NC	NC
D	NC	NC	NC	NC								NC	NC	NC
E	NC	NC	NC		RFU	VCC	VSS	RFU	RFU	RFU		NC	NC	NC
F	NC	NC	NC		VCC						RFU		NC	NC
G	NC	NC	RFU		VSS						RFU		NC	NC
H	NC	NC	NC		DS						VSS		NC	NC
J	NC	NC	NC		VSS						VCC		NC	NC
K	NC	NC	NC		RST_n	RFU	RFU	VSS	VCC	VCC	RFU		NC	NC
L	NC	NC	NC									NC	NC	NC
M	NC	NC	NC	VCCQ	CMD	CLK	NC	NC	NC	NC	NC	NC	NC	NC
N	NC	VSSQ	NC	VCCQ	VSSQ	NC	NC	NC	NC	NC	NC	NC	NC	NC
P	NC	NC	VCCQ	VSSQ	VCCQ	VSSQ	RFU	NC	NC	RFU	NC	NC	NC	NC

4.1.2 Signal Descriptions

Table 6: Signal Descriptions

Signal	Type	Description
CLK	Input	Clock. Each cycle of the clock directs a transfer on the command line and on the data line(s). The frequency can vary between the minimum and the maximum clock frequency.
DS	Output	eMMC interface data strobe (HS400 mode)
CMD	I/O	Command. This signal is a bidirectional command channel used for command and response transfers. The CMD signal has two bus modes: open-drain mode and push-pull mode. Commands are sent from the MMC host to the device, and responses are sent from the device to the host.
DAT0 – DAT7	I/O	Data I/O. These are bidirectional data signals. The DAT signals operate in push-pull mode. By default, after power-up or assertion of the RST_n signal, only DAT0 is used for data transfer. The MMC controller can configure a wider data bus for data transfer using either DAT[3:0] (4-bit mode) or DAT[7:0] (8-bit mode). eMMC includes internal pull-up resistors for data lines DAT[7:1]. Immediately after entering the 4-bit mode, the device disconnects the internal pull-up resistors on the DAT[3:1] lines. Correspondingly, immediately after entering the 8-bit mode, the device disconnects the internal pull-ups on the DAT[7:1] lines.
RST_n	Input	Reset. The RST_n signal is used for host resetting device, moving the device to pre-idle state. By default, the RST_n signal is temporary disabled in device. The host must set bits[1:0] in the extended CSD register [162] to 0x1 to enable this functionality before the host can use it.
VCC	Supply	NAND interface I/O and NAND Flash power supply.
VCCQ	Supply	eMMC controller core and eMMC interface I/O power supply.
VSS	Supply	NAND interface I/O and NAND Flash ground connection.
VSSQ	Supply	eMMC controller core and eMMC interface ground connection.
VDDi	-	Internal voltage node 0.1 μ F x 1 and 2.2 μ F x 1 capacitors are recommended for VDDi for core power stabilization.* Do not tie to supply voltage or ground.
NC	-	No connect
RFU	-	Reserved for future use. Leave it floating.


* A minimum of 1uF is required.



5 eMMC MECHANICAL SPECIFICATIONS

5.1 Package Dimensions

Figure 3: 153-Ball BGA Dimensions – 11.5 mm x 13 mm x 0.8 mm

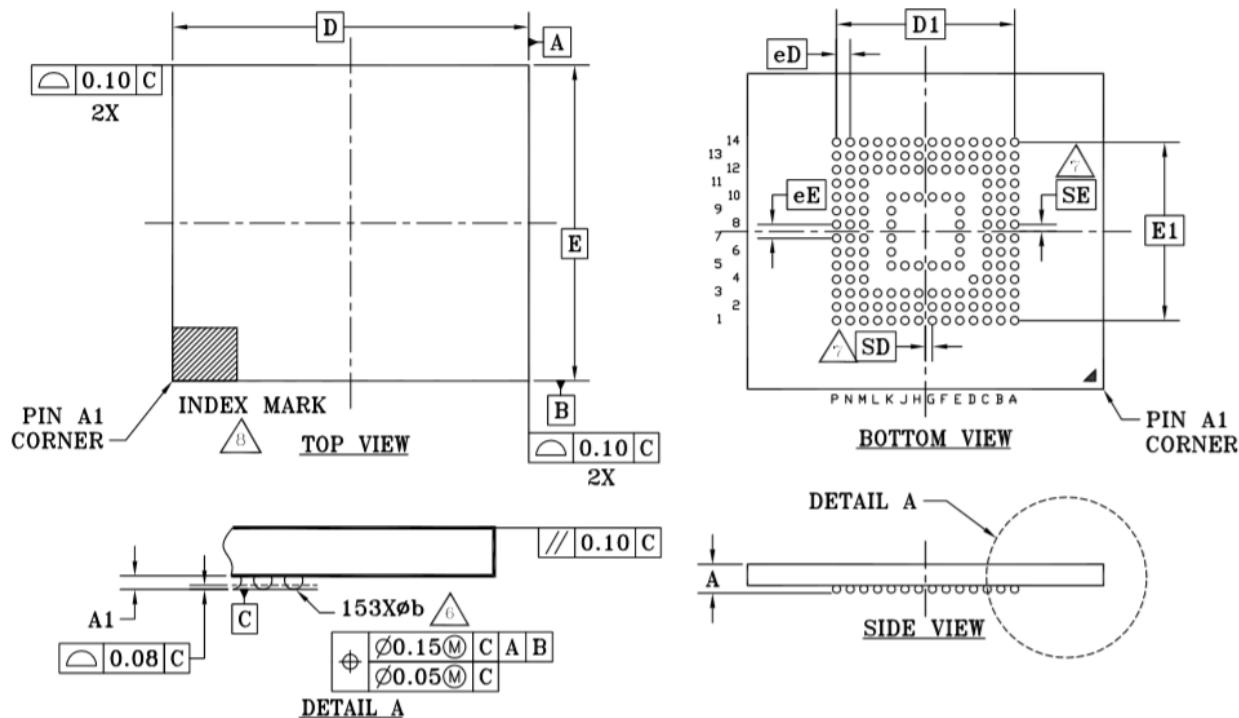



PACKAGE	TBD 153			NOTE
JEDEC	MO-276			
D X E	13.00mm X 11.50mm PACKAGE			
SYMBOL	MIN.	NOM.	MAX.	
A	0.70	---	0.80	PROFILE
A1	0.17	---	--	BALL HEIGHT
[D]	13.00 BSC		BODY SIZE	
[E]	11.50 BSC		BODY SIZE	
[D1]	6.50 BSC		MATRIX FOOTPRINT	
[E1]	6.50 BSC		MATRIX FOOTPRINT	
MD	14		MATRIX SIZE D DIRECTION	
ME	14		MATRIX SIZE E DIRECTION	
n	153		BALL COUNT	
Ø b	0.25	0.30	0.35	BALL DIAMETER
[eE]	0.50 BSC		BALL PITCH	
[eD]	0.50 BSC		BALL PITCH	
[SD] / [SE]	0.25 BSC		SOLDER BALL PLACEMENT	
	D5-D11,E11-K11,L4-L11,E4-K4 F6-F9,G6-G9,H6-H9,J6-J9		DEPOPULATED SOLDER BALLS	

NOTES:

1. DIMENSIONING AND TOLERANCING METHODS PER ASME Y14.5-2009.
THIS OUTLINE CONFORMS TO JEP 95, SECTION 4.6.
 2. ALL DIMENSIONS ARE IN MILLIMETERS.
 3. BALL POSITION DESIGNATION PER JEP 95, SECTION 3, SPP-020.
 4. [e] REPRESENTS THE SOLDER BALL GRID PITCH.
 5. SYMBOL "MD" IS THE BALL MATRIX SIZE IN THE "D" DIRECTION.
SYMBOL "ME" IS THE BALL MATRIX SIZE IN THE "E" DIRECTION.
n IS THE NUMBER OF POPULATED SOLDER BALL POSITIONS FOR MATRIX SIZE MD X ME.
 6. DIMENSION "b" IS MEASURED AT THE MAXIMUM BALL DIAMETER IN A PLANE PARALLEL TO DATUM C.
 7. [SD] AND [SE] ARE MEASURED WITH RESPECT TO DATUMS A AND B AND DEFINE THE POSITION OF THE CENTER SOLDER BALL IN THE OUTER ROW. WHEN THERE IS AN ODD NUMBER OF SOLDER BALLS IN THE OUTER ROW [D] OR [SE] = 0.000.
WHEN THERE IS AN EVEN NUMBER OF SOLDER BALLS IN THE OUTER ROW [SD] OR [SE] = [e]/2
 8. A1 CORNER TO BE IDENTIFIED BY CHAMFER, LASER OR INK MARK, METALLIZED MARK INDENTATION OR OTHER MEANS.
9. TEST PADS MAY BE PRESENT BUT ARE NOT SHOWN. THEY ARE FOR INTERNAL USE ONLY AND ARE NOT SOLDER BALLS.

5.2 Recommended Reflow Profiles

Table 7: Recommended Reflow Profile

Reflow Parameters	Suggested Range
Peak Temperature	235 - 245°C
Time Above liquidus	45 to 70 seconds
Cooling Rate	< 4°C/sec

Note: Each solder paste manufacturer will have their own reflow profile specification. It's recommended customers follow the solder paste manufacturer's reflow profile specification and optimize the reflow profile based on product complexity for the assembly process.




6 ELECTRICAL SPECIFICATION

6.1 Electrical Interface

The device current consumption for various device configurations is defined in the power class fields of the ECSD register.

V_{CC} is used for the NAND Flash device; V_{CCQ} is used for the controller and the eMMC interface voltage.


Figure 4: System Architecture

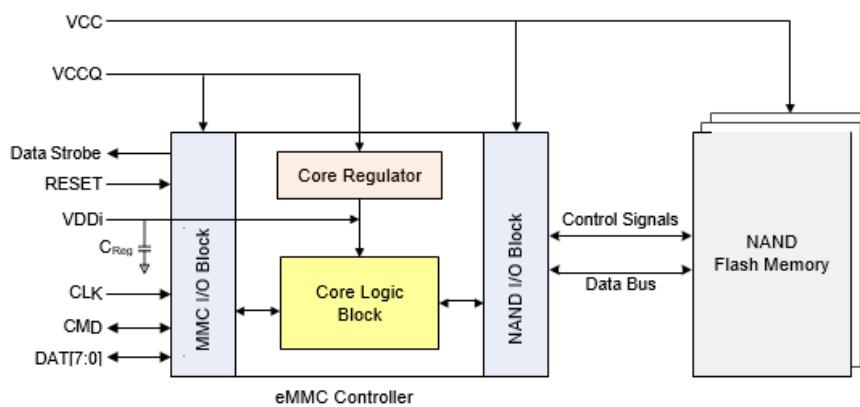

6.2 DC Specifications

Table 8: Power Requirements

Symbol	Parameter	Value (Minimum)	Value (Typical)	Value (Maximum)	Unit
V _{CC}	Voltage supply to Flash memory	2.7	3.3	3.6	V
V _{CCQ}	Voltage supply to host interface	2.7 (high range) 1.70 (low range)	3.3 (high range) 1.80 (low range)	3.6 (high range) 1.95 (low range)	V
V _{DDi}	Internal voltage regulator connection to external capacitor	-	-	-	-

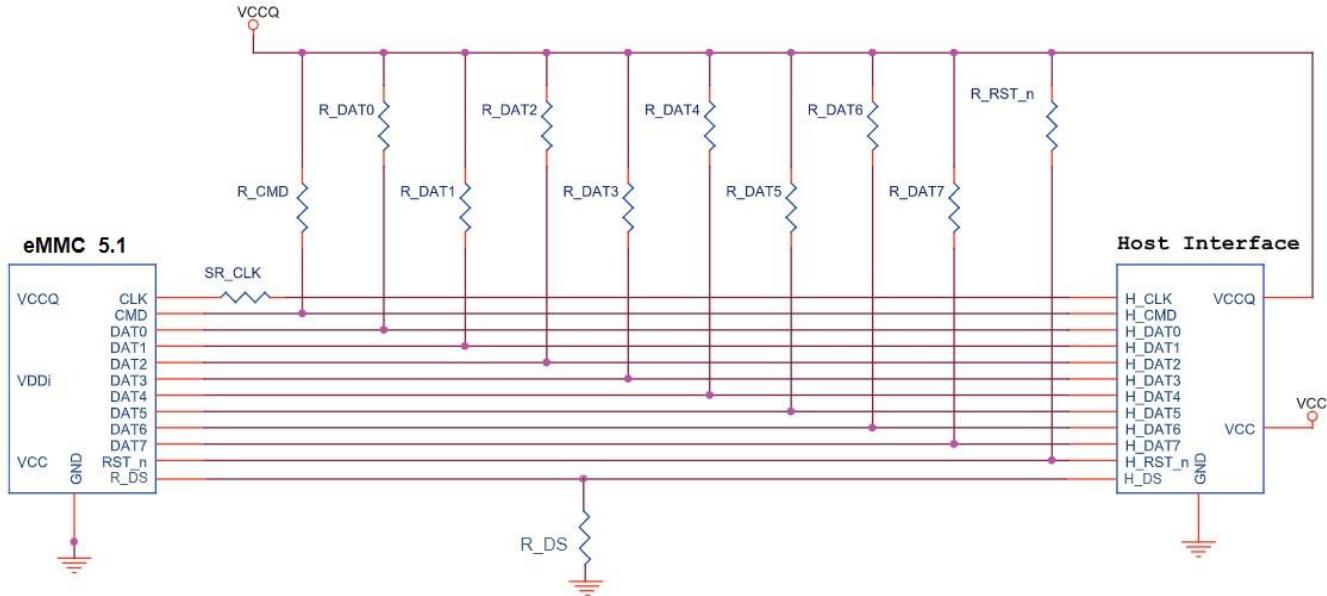**Figure 5: Recommended eMMC Connection****Table 9: Recommended Capacitor and Resistor**

Parameter	Symbol	Recommended	Comments
Pull-up resistance for CMD	R_CMD	10 kΩ	To prevent bus floating.
Pull-up resistance for DAT[7:0]	R_DAT	50 kΩ	To prevent bus floating.
Pull-up resistance for RST_n	R_RST_n	50 kΩ	A pull-up resistance on the RST_n (H/W reset) line is not required if the host does not enable the H/W reset feature.
Series termination for CLK	SR_CLK	22Ω	To stabilize the clock signal. It is recommend for customers to perform simulations using the controller IBIS model to confirm this value.
Pull-Down resistance for Data Strobe	R_DS	50 kΩ	

Decoupling Capacitor Recommendations

- X7R or X5R capacitors are recommended with a rated voltage > 6.3V.
- 0603 or a smaller size is recommended.
- Pick capacitors with low ESL and ESR.
- It is important to place decoupling caps as close to the target supply balls while maintaining > 20 mil trace width for supply connections to capacitor SMT pads.
- Recommended Value and Quantity:
VCCQ: More than 0.1 μF x 1, 2.2 μF x 1 (for BGA153, this cap should be as close as possible to C6 ball), and 1 x 1 μF
VCC: More than 0.1 μF x 1 and 2.2 μF x 1
VDDi: More than 0.1 μF x 1 and 2.2 μF x 1

A minimum of 1uF is required for VCCQ, VCC, and VDDi.

Customer is requested to place all of the caps shown above. For VCCQ caps, they should be located as close as possible to the VCCQ/VSSQ balls near the DAT0-7 signals.

7 REGISTER

The registers used in the SMART eMMC are shown in the table below. These registers are described in the sections that follow:

Table 10: Supported Device Registers

Name	Width	Description
CID	128 (Bits)	Card Identification
OCR	32 (Bits)	Operation Condition Register
CSD	128 (Bits)	Card Specific Data
ECSD	512 (Bytes)	Extended Card Specific Data

* The values in each register are based on MLC configuration.

7.1 CID Register

The card identification (CID) register is 128 bits wide. It contains the device identification information used during the card identification phase as required by the eMMC protocol. Each device is created with a unique identification number.

Table 11: CID Register Field Parameters

Name	Field	Width (Bits)	CID Bits	SMART CID Value
Manufacturer ID	MID	8	[127:120]	0x01
Reserved	-	6	[119:114]	--
Device / BGA	CBX	2	[113:112]	0x01
OEM/application ID	OID	8	[111:104]	0x00
Product name	PNM	48	[103:56]	4GB:0x533430303034 8GB:0x533430303038
Product revision	PRV	8	[55:48]	4GB:0x01 8GB:0x10
Product serial number	PSN	32	[47:16]	-- ⁽¹⁾
Manufacturing date	MDT	8	[15:8]	-- ⁽²⁾
CRC7 checksum	CRC	7	[7:1]	-- ⁽³⁾
reserved	-	1	0	--

Note:

- (2) Unique for each device. 32-bit unsigned binary integer.
- (3) 2 hex digits for device manufacturing month and year.
- (4) CRC for CID register. Different for each device.

7.2 OCR Register

The card identification (OCR) register is 128 bits wide. It contains the device identification information used during the card identification phase as required by the eMMC protocol. Each device is created with a unique identification number.

Table 12: OCR Register Field Definitions

V _{DD} Voltage Window	Width (Bits)	OCR Bits	OCR Value
Ready/Busy	1	[31]	card power up status bit (busy) ⁽¹⁾
Access Mode	2	[30:29]	10b
Reserved	5	[28:24]	--
2.7-3.6V	9	[23:15]	1 1111 1111b
2.0-2.6V	7	[14:8]	000 0000b
1.70-1.95V	1	[7]	1b
Reserved	7	[6:0]	--

Note:

- (1) This bit is set to low if the device has not finished the power up routine.

7.3 CSD Register

The card-specific data (CSD) register provides information about accessing the device contents. The CSD register defines the data format, error correction type, maximum data access time, and data transfer speed, as well as whether the DS register can be used. The programmable part of the register (entries marked with W or E in the following table) can be changed by the PROGRAM_CSD (CMD27) command.

Table 13: CSD Register Field Parameters

Name	Field	Width (Bits)	CSD Bits	CSD Value
CSD structure	CSD_STRUCTURE	2	[127:126]	0x03
System specification version	SPEC_VERS	4	[125:122]	0x04
Reserved	--	2	[121:120]	--
Data read access time 1	TAAC	8	[119:112]	0x27
Data read access time 2 in CLK cycles (NSAC x 100)	NSAC	8	[111:104]	0x01
Maximum bus clock frequency	TRAN_SPEED	8	[103:96]	0x32
Device command classes	CCC	12	[95:84]	0xF5
Maximum read data block length	READ_BL_LEN	4	[83:80]	0x09
Partial blocks for reads supported	READ_BL_PARTIAL	1	[79]	0x00
Write block misalignment	WRITE_BLK_MISALIGN	1	[78]	0x00
Read block misalignment	READ_BLK_MISALIGN	1	[77]	0x00
DSR implemented	DSR_IMP	1	[76]	0x00
Reserved	--	2	[75:74]	--
Device size	C-SIZE	12	[73:62]	0xFFFF
Maximum read current as VDD,min	VDD_R_CURR_MIN	3	[61:59]	0x07
Maximum read current as VDD,max	VDD_R_CURR_MAX	3	[58:56]	0x07
Maximum write current as VDD,min	VDD_W_CURR_MIN	3	[55:53]	0x07
Maximum write current as VDD,max	VDD_W_CURR_MAX	3	[52:50]	0x07
Device size multiplier	C-SIZE_MULT	3	[49:47]	0x07
Erase group size	ERASE_GRP_SIZE	5	[46:42]	0x1F
Erase group size multiplier	ERASE_GRP_SIZE_MULT	5	[41:37]	0x1F
Write protect group size	WP_GRP_SIZE	5	[36:32]	0x0F
Write protect group enable	WP_GRP_ENABLE	1	[31]	0x01
Manufacturer default ECC	DEFAULT_ECC	2	[30:29]	0x00
Write-speed factor	R2W_FACTOR	3	[28:26]	0x02
Maximum write data block length	WRITE_BL_LEN	4	[25:22]	0x09
Partial blocks for write allowed	WRITE_BL_PARTIAL	1	[21]	0x00
Reserved	--	4	[20:17]	--
Content protection application	CONTENT_PROT_APP	1	[16]	0x00

Name	Field	Width (Bits)	CSD Bits	CSD Value
File-format group	FILE_FORMAT_GRP	1	[15]	0x00
Copy flag (OTP)	COPY	1	[14]	4GB:0x00 8GB:0x01
Permanent write protection	PERM_WRITE_PROTECT	1	[13]	0x00
Temporary write protection	TEMP_WRITE_PROTECT	1	[12]	0x00
File format	FILE_FORMAT	2	[11:10]	0x00
ECC code	ECC	2	[9:8]	0x00
CRC	CRC	7	[7:1]	--
Not used; always 1	--	1	[0]	--

7.4 ECSD Register

The 512-byte extended card-specific data (ECSD) register defines device properties and selected modes. The most significant 320 bytes are the properties segment. This segment defines device capabilities and cannot be modified by the host. The lower 192 bytes are the modes segment. The modes segment defines the configuration in which the device is working. The host can change the properties of modes segments using the SWITCH command.

Table 14: ECSD Register Field Parameters

Name	Field	Size (Bytes)	Cell Type ⁽¹⁾	ECSD Bytes	ECSD Values
Reserved	--	6	--	[511:506]	--
Extended Security Commands Error	EXT_SECURITY_ERR	1	R	[505]	0x00
Supported command sets	S_CMD_SET	1	R	[504]	0x01
HPI features	HPI_FEATURES	1	R	[503]	0x01
Background operations support	BKOPS_SUPPORT	1	R	[502]	0x01
Max packed read commands	MAX_PACKED_READS	1	R	[501]	4GB:0x3F 8GB:0x20
Max packed write commands	MAX_PACKED_WRITES	1	R	[500]	4GB:0x3F 8GB:0x20
Data tag support	DATA_TAG_SUPPORT	1	R	[499]	0x01
Tag unit size	TAG_UNIT_SIZE	1	R	[498]	0x00
Tag resources size	TAG_RES_SIZE	1	R	[497]	0x00
Context management capabilities	CONTEXT_CAPABILITIES	1	R	[496]	0x78
Large unit size	LARGE_UNIT_SIZE_M1	1	R	[495]	0x01
Extended partitions attribute support	EXT_SUPPORT	1	R	[494]	0x03
Supported Modes	SUPPORTED_MODES	1	R	[493]	0x01
FFU features	FFU_FEATURES	1	R	[492]	0x00
Operations code timeout	OPERATION_CODE_TIMEOUT	1	R	[491]	0x17
FFU Argument	FFU_ARG	4	R	[490:487]	0xFFFFFFF0
Reserved	--	181	--	[486:309]	--
CMD Queuing Support	CMDQ_SUPPOR	1	R	[308]	0x01
CMD Queuing Depth	CMDQ_DEPTH	1	R	[307]	0x1F
Reserved	--	1	--	[306]	--
Number of FW sectors correctly programmed	NUMBER_OF_FW_SECTORS_CORRECTLY_PROGRAMMED	4	R	[305:302]	0x00

Name	Field	Size (Bytes)	Cell Type ⁽¹⁾	ECSD Bytes	ECSD Values
Vendor proprietary health report	VENDOR_PROPRIETARY_HEALTH_REPORT	32	R	[301:270]	0x00
Device life time estimation type B	DEVICE_LIFE_TIME_EST_TYP_B	1	R	[269]	Variable
Device life time estimation type A	DEVICE_LIFE_TIME_EST_TYP_A	1	R	[268]	Variable
Pre EOL information	PRE_EOL_INFO	1	R	[267]	Variable
Optimal read size	OPTIMAL_READ_SIZE	1	R	[266]	0x40
Optimal write size	OPTIMAL_WRITE_SIZE	1	R	[265]	0x40
Optimal trim unit size	OPTIMAL_TRIM_UNIT_SIZE	1	R	[264]	0x07
Device Version	Device version	2	R	[263:262]	4GB:0x3405 8GB:0x3805
Firmware version	FIRMWARE_VERSION	8	R	[261:254]	--(1)
Power class for 200MHz, DDR at VCC=3.6V	PWR_CL_DDR_200_360	1	R	[253]	0x00
Cache size	CACHE_SIZE	4	R	[252:249]	0x400
Generic CMD6 timeout	GENERIC_CMD6_TIME	1	R	[248]	0x05
Power off notification (long) timeout	POWER_OFF_LONG_TIME	1	R	[247]	0x64
Background operations status	BKOPS_STATUS	1	R	[246]	0x00
Number of correctly programmed sectors	CORRECTLY_PRG_SECTORS_NUM	4	R	[245:242]	0x00
First initialization time after partitioning	INI_TIMEOUT_AP	1	R	[241]	0x0A
Reserved	--	1	--	[240]	--
Power class for 52 MHz, DDR at 3.6V	PWR_CL_DDR_52_360	1	R	[239]	0x00
Power class for 52 MHz, DDR at 1.95V	PWR_CL_DDR_52_195	1	R	[238]	0x00
Power class for 200 MHz at 1.95V, VCC = 3.6V	PWR_CL_200_195	1	R	[237]	0x00
Power class for 200 MHz at 1.3V, VCC = 3.6V	PWR_CL_200_130	1	R	[236]	0x00
Minimum write performance for 8-bit at 52 MHz in DDR mode	MIN_PERF_DDR_W_8_52	1	R	[235]	0x00

Name	Field	Size (Bytes)	Cell Type ⁽¹⁾	ECSD Bytes	ECSD Values
Minimum read performance for 8-bit at 52 MHz in DDR mode	MIN_PERF_DDR_R_8_52	1	R	[234]	0x00
Reserved	--	1	--	[233]	--
TRIM multiplier	TRIM_MULT	1	R	[232]	0x02
Secure feature support	SEC_FEATURE_SUPPORT	1	R	[231]	0x55
SECURE ERASE multiplier	SEC_ERASE_MULT	1	R	[230]	4GB:0xFF 8GB:0x19
SECURE TRIM multiplier	SEC_TRIM_MULT	1	R	[229]	4GB:0xFF 8GB:0x0A
Boot information	BOOT_INFO	1	R	[228]	0x07
Reserved	--	1	--	[227]	--
Boot partition size	BOOT_SIZE_MULT	1	R	[226]	0x20
Access size	ACC_SIZE	1	R	[225]	0x06
High-capacity erase unit size	HC_ERASE_GRP_SIZE	1	R	[224]	0x01
High-capacity erase timeout	ERASE_TIMEOUT_MULT	1	R	[223]	0x02
Reliable write-sector count	REL_WR_SEC_C	1	R	[222]	0x01
High-capacity write protect group size	HC_WP_GRP_SIZE	1	R	[221]	0x10
Sleep current (Vcc)	S_C_VCC	1	R	[220]	0x07
Sleep current (Vccq)	S_C_VCCQ	1	R	[219]	0x07
Production state awareness timeout	PRODUCTION_STATE_AWARENESS_TIMEOUT	1	R	[218]	0x17
Sleep/awake timeout	S_A_TIMEOUT	1	R	[217]	4GB:0x13 8GB:0x12
Sleep Notification Timeout	SLEEP_NOTIFICATION_TIME	1	R	[216]	0x0C
Sector count	SEC-COUNT	4	R	[215:212]	4GB:0x00748000 8GB:0x00E90000
Reserved	--	1	--	[211]	--
Minimum write performance for 8-bit at 52 MHz	MIN_PERF_W_8_52	1	R	[210]	0x00
Minimum read performance for 8-bit at 52 MHz	MIN_PERF_R_8_52	1	R	[209]	0x00

Name	Field	Size (Bytes)	Cell Type ⁽¹⁾	ECSD Bytes	ECSD Values
Minimum write performance for 8-bit at 26 MHz and 4-bit at 52 MHz	MIN_PERF_W_8_26_4_52	1	R	[208]	0x00
Minimum read performance for 8-bit at 26 MHz and 4-bit at 52 MHz	MIN_PERF_R_8_26_4_52	1	R	[207]	0x00
Minimum write performance for 4-bit at 26 MHz	MIN_PERF_W_4_26	1	R	[206]	0x00
Minimum read performance for 4-bit at 26 MHz	MIN_PERF_R_4_26	1	R	[205]	0x00
Reserved	--	1	--	[204]	--
Power class for 26 MHz at 3.6V 1 R	PWR_CL_26_360	1	R	[203]	0x00
Power class for 52 MHz at 3.6V 1 R	PWR_CL_52_360	1	R	[202]	0x00
Power class for 26 MHz at 1.95V 1 R	PWR_CL_26_195	1	R	[201]	0x00
Power class for 52 MHz at 1.95V 1 R	PWR_CL_52_195	1	R	[200]	0x00
Partition switching timing	PARTITION_SWITCH_TIME	1	R	[199]	4GB:0x06 8GB:0x04
Out-of-interrupt busy timing	OUT_OF_INTERRUPT_TIME	1	R	[198]	4GB:0x05 8GB:0x0A
I/O driver strength	DRIVER_STRENGTH	1	R	[197]	0x1F
Card type	CARD_TYPE	1	R	[196]	0x57
Reserved	--	1	--	[195]	--
CSD structure version	CSD_STRUCTURE	1	R	[194]	0x02
Reserved	--	1	--	[193]	--
Extended CSD revision	EXT_CSD_REV	1	--	[192]	0x08
Command set	CMD_SET	1	R/W/E_P	[191]	0x00
Reserved	--	1	--	[190]	--
Command set revision	CMD_SET_REV	1	R	[189]	0x00
Reserved	--	1	--	[188]	--
Power class	POWER_CLASS	1	R/W/E_P	[187]	0x00
Reserved	--	1	--	[186]	--
High-speed interface timing	HS_TIMING	1	R/W/E_P	[185]	0x00

Name	Field	Size (Bytes)	Cell Type ⁽¹⁾	ECSD Bytes	ECSD Values
Reserved	--	1	--	[184]	--
Bus width mode	BUS_WIDTH	1	W/E_P	[183]	0x00
Reserved	--	1	--	[182]	--
Erased memory content	ERASED_MEM_CONT	1	R	[181]	0x00
Reserved	--	1	--	[180]	--
Partition configuration	PARTITION_CONFIG	1	R/W/E, R/W/E_P	[179]	0x00
Boot config protection	BOOT_CONFIG_PROT	1	R/W, R/W/C_P	[178]	0x00
Boot bus Conditions	BOOT_BUS_CONDITIONS	1	R/W/E	[177]	0x00
Reserved	--	1	--	[176]	--
High-density erase group definition	ERASE_GROUP_DEF	1	R/W/E_P	[175]	0x00
Boot write protection status registers	BOOT_WP_STATUS	1	R	[174]	0x00
Boot area write protection register	BOOT_WP	1	R/W, R/W/C_P	[173]	0x00
Reserved	--	1	-	[172]	--
User write protection register	USER_WP	1	R/W, R/W/C_P, R/W/E_P	[171]	0x00
Reserved	--	1	--	[170]	--
Firmware configuration	FW_CONFIG	1	R/W	[169]	0x00
RPMB size	RPMB_SIZE_MULT	1	R	[168]	0x20
Write reliability setting register	WR_REL_SET	1	R/W	[167]	0x1F
Write reliability parameter register	WR_REL_PARAM	1	R	[166]	0x15
Start sanitize operation	SANITIZE_START	1	W/E_P	[165]	0x00
Manually start background operations	BKOPS_START	1	W/E_P	[164]	0x00
Enable background operations handshake	BKOPS_EN	1	R/W	[163]	4GB:0x00 8GB:0x02
Hardware reset function	RST_n_FUNCTION	1	R/W	[162]	0x00
HPI management	HPI_MGMT	1	R/W/E/P	[161]	0x00

Name	Field	Size (Bytes)	Cell Type ⁽¹⁾	ECSD Bytes	ECSD Values
Partitioning support	PARTITIONING_SUPPORT	1	R/W/E, R/W/E_P	[160]	0x07
Maximum enhanced area size	MAX_ENH_SIZE_MULT	3	R	[159:157]	4GB:0x0000E9 8GB:0x0001D2
Partitions attribute	PARTITIONS_ATTRIBUTE	1	R/W	[156]	0x00
Partitioning setting	PARTITIONING_SETTING-COMPLETED	1	R/W	[155]	0x00
General-purpose partition size	GP_SIZE_MULT	12	R/W	[154:143]	0x00
Enhanced user data area size	ENH_SIZE_MULT	3	R/W	[142:140]	0x00
Enhanced user data start address	ENH_START_ADDR	4	R/W	[139:136]	0x00
Reserved	-	1	-	[135]	--
Bad block management mode	SEC_BAD_BLK_MGMNT	1	R/W	[134]	0x00
Production state awareness	PRODUCTION_STATE_AWARENESS	1	R/W/E	[133]	0x00
Package case temperature is controlled	TCASE_SUPPORT	1	W/E_P	[132]	0x00
Periodic wake-up	PERIODIC_WAKEUP	1	R/W/E	[131]	0x00
Program CID/CSD in DDR mode support	PROGRAM_CID_CSD_DDR_SUPP ORT	1	R	[130]	4GB:0x00 8GB:0x01
Reserved	-	2	-	[129:128]	--
Vendor specific fields	VENDOR_SPECIFIC_NFIELD	64	<vs>	[127:64]	0x00
Native sector size	NATIVE_SECTOR_SIZE	1	R	[63]	0x01
Sector size emulation	USE_NATIVE_SECTOR	1	R/W	[62]	0x00
Sector size	DATA_SECTOR_SIZE	1	R	[61]	0x00
1st initialization after disabling sector size emulation	INI_TIMEOUT_EMU	1	R	[60]	0x0A
Class 6 command control	CLASS_6_CTRL	1	R/W/E_P	[59]	0x00
Number of addressed groups to be released	DYNCAP_NEEDED	1	R	[58]	0x00
Exception events control	EXCEPTION_EVENTS_CTRL	2	R/W/E_P	[57:56]	0x00
Exception events status	EXCEPTION_EVENTS_STATUS	2	R	[55:54]	0x00
Extended partitions attribute	EXT_PARTITION_ATTRIBUTE	2	R/W	[53:52]	0x00

Name	Field	Size (Bytes)	Cell Type ⁽¹⁾	ECSD Bytes	ECSD Values
Context configuration	CONTEXT_CONF	15	R/W/E_P	[51:37]	0x00
Packed command status	PACKED_COMMAND_STATUS	1	R	[36]	0x00
Packed command failure index	PACKED_FAILURE_INDEX	1	R	[35]	0x00
Power off notification	POWER_OFF_NOTIFICATION	1	R/W/E_P	[34]	0x00
Control to turn the cache on/off	CACHE_CTRL	1	R/W/E_P	[33]	0x00
Flushing of the cache	FLUSH_CACHE	1	W/E_P	[32]	0x00
Control to turn the Barrier ON/OFF	BARRIER_CTRL	1	R/W	[31]	0x00
Mode config	MODE_CONFIG	1	R/W/E_P	[30]	0x00
Mode operation codes	MODE_OPERATION_CODES	1	W/E_P	[29]	0x00
Reserved	-	2	-	[28:27]	--
FFU status	FFU_STATUS	1	R	[26]	0x00
Pre loading data size	PRE_LOADING_DATA_SIZE	4	R/W/E_P	[25:22]	0x00
Max pre loading data size	MAX_PRE_LOADING_DATASIZE	4	R	[21:18]	4GB:0x00748000 8GB: 0x00E90000
Product state awareness enablement	PRODUCT_STATE_AWARENESS_ENABLEMENT	1	R/W/E & R	[17]	0x01
Secure removal type	SECURE_REMOVAL_TYPE	1	R/W & R	[16]	0x3B
Reserved	-	16	-	[15:0]	--

(1) Note: FIRMWARE_VERSION depends on capacity.


8 PART NUMBERS

Table 14: Part Numbering Information

Capacity	Part Number	Packaging
4GB	KTM4GH1AHI01	Tray
4GB	KTM4GH1AHI01-TR	Tape and Reel
8GB	KTM8GH2AHI01	Tray



8.1 Part Number Decoder

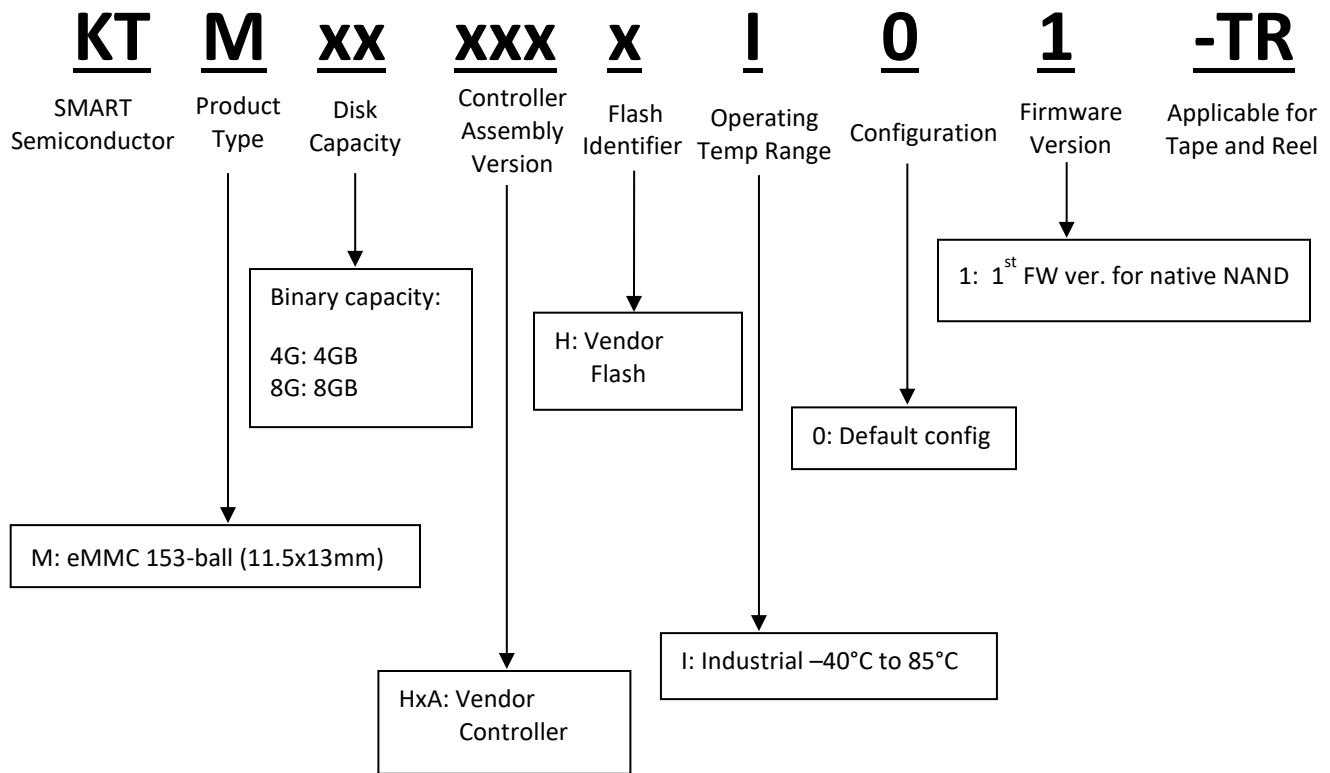


Note:


¹ Actual Firmware Revision as reported in ECSD [257:254] in ASCII



8.2 Packaging Information

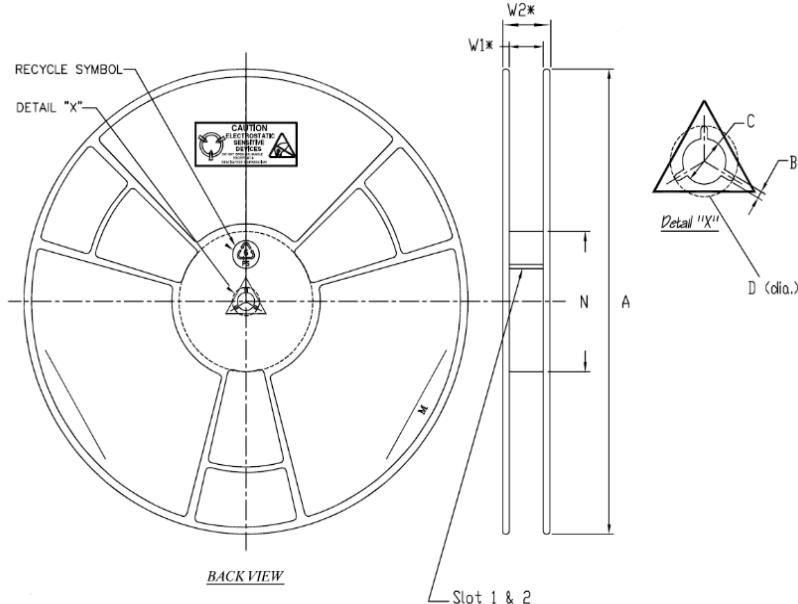

Dimensions	24mm
A	330 Max
N	98 - 102
D	20.7 - 21.3
C	12.8 - 13.2
B	1.5 - 2.5
W1	24.4 - 26.4
W2	30.4 Max

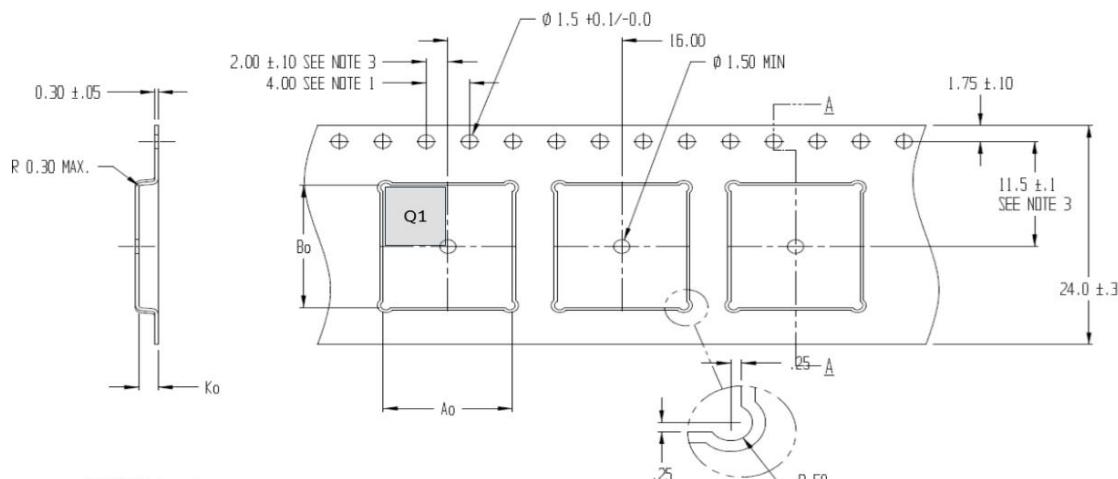

NOTES:
1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ±0.2
2. CAMBER IN COMPLIANCE WITH EIA 481
3. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE

* MSL:3

* All dimensions in millimeters.

Disclaimer:

No part of this document may be copied or reproduced in any form or by any means, or transferred to any third party, without the prior written consent of an authorized representative of SMART Semiconductor. ("SMARTsemi"). The information in this document is subject to change without notice. SMARTsemi assumes no responsibility for any errors or omissions that may appear in this document, and disclaims responsibility for any consequences resulting from the use of the information set forth herein. SMARTsemi makes no commitments to update or to keep current information contained in this document. The products listed in this document are not suitable for use in applications such as, but not limited to, aircraft control systems, aerospace equipment, submarine cables, nuclear reactor control systems, and life support systems. Moreover, SMARTsemi does not recommend or approve the use of any of its products in life support devices or systems, or in any application where failure could result in injury or death. If a customer wishes to use SMARTsemi products in applications not intended by SMARTsemi, said customer must contact an authorized SMARTsemi representative to determine SMARTsemi's willingness to support a given application. The information set forth in this document does not convey any license under the copyrights, patent rights, trademarks, or other intellectual property rights claimed and owned by SMARTsemi. The information set forth in this document is considered to be "Proprietary" and "Confidential" property owned by SMARTsemi.

ALL PRODUCTS SOLD BY SMARTSEMI ARE COVERED BY THE PROVISIONS APPEARING IN SMARTSEMI'S TERMS AND CONDITIONS OF SALE ONLY, INCLUDING THE LIMITATIONS OF LIABILITY, WARRANTY, AND INFRINGEMENT PROVISIONS. SMARTSEMI MAKES NO WARRANTIES OF ANY KIND, EXPRESS, STATUTORY, IMPLIED, OR OTHERWISE, REGARDING INFORMATION SET FORTH HEREIN OR REGARDING THE FREEDOM OF THE DESCRIBED PRODUCTS FROM INTELLECTUAL PROPERTY INFRINGEMENT, AND EXPRESSLY DISCLAIMS ANY SUCH WARRANTIES INCLUDING WITHOUT LIMITATION ANY EXPRESS, STATUTORY, OR IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

©2023 SMART Semiconductor. All rights reserved.